




WEIGHT
CAPACITY
550 kg



RADIUS
4000 mm

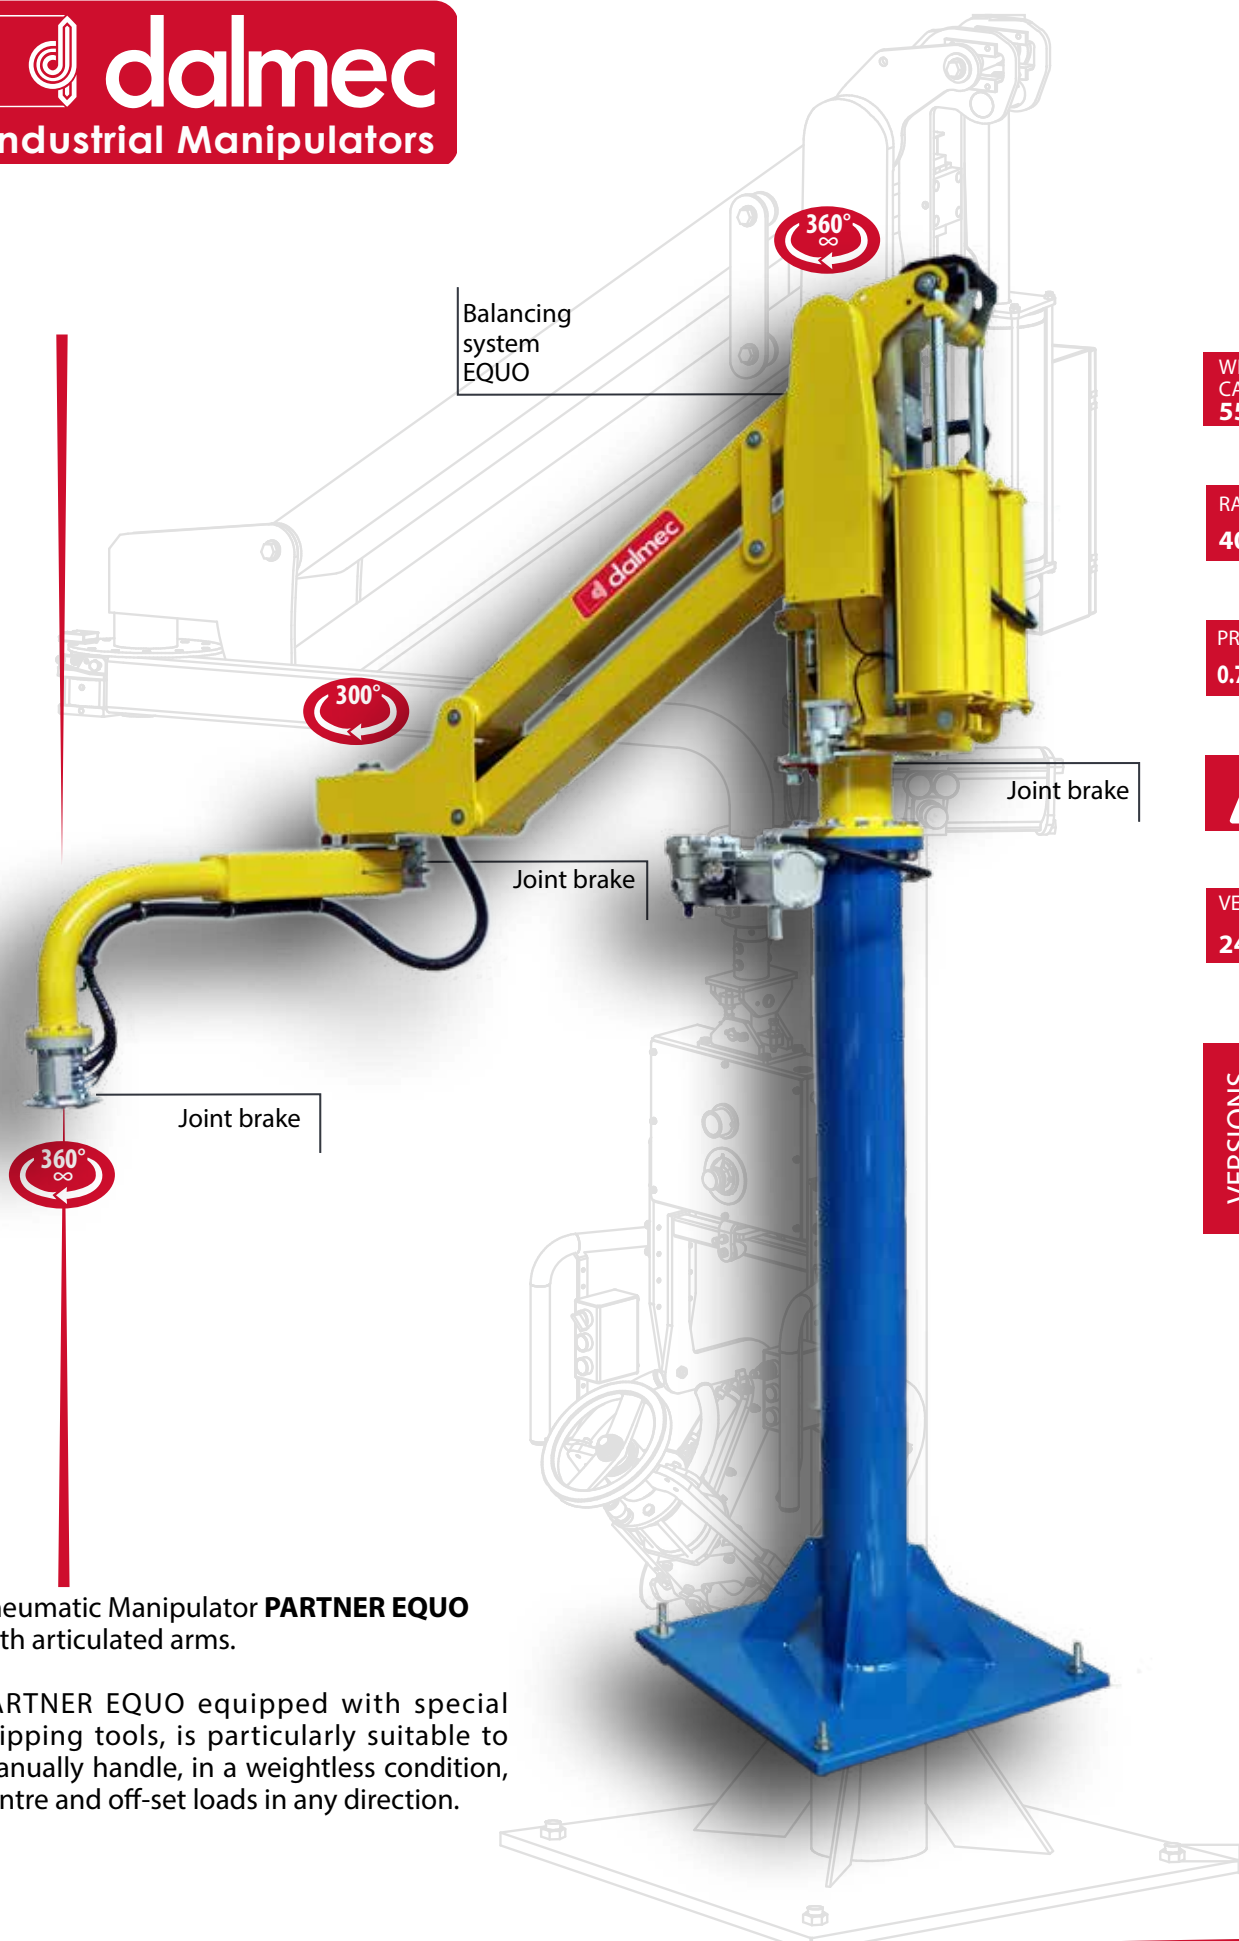

PRESSURE
0.7-0.8 Mpa



LOAD **OFF-SET**

VERTICAL LIFT
2450 mm

VERSIONS
COLUMN
FIXED
OVERHEAD
RUNNING
OVERHEAD


Pneumatic Manipulator **PARTNER EQUO**
with articulated arms.

PARTNER EQUO equipped with special
gripping tools, is particularly suitable to
manually handle, in a weightless condition,
centre and off-set loads in any direction.


PARTNER EQUO[®] - PE

PARTNER EQUO® - PE



Partner column mounted - PEC

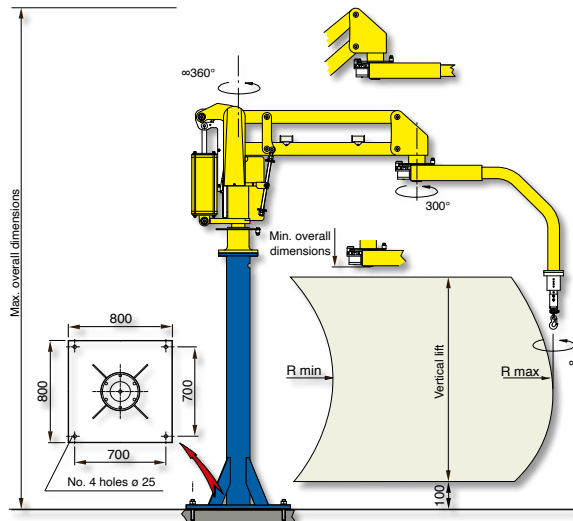



Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned or with autostable motorised trolley that translates on a simple profile track on the floor.

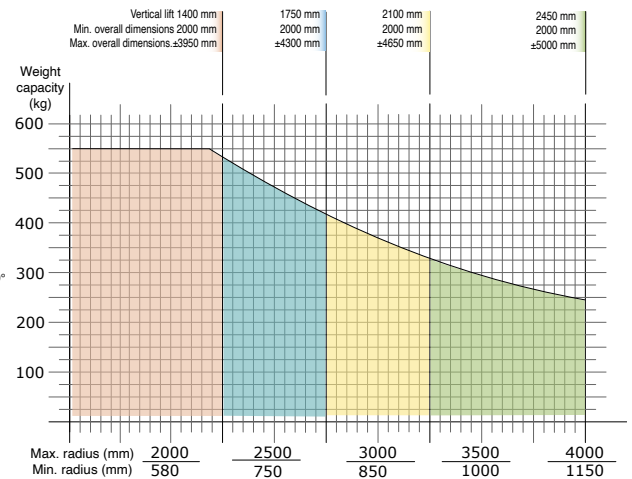

Partner overhead mounted - PEF

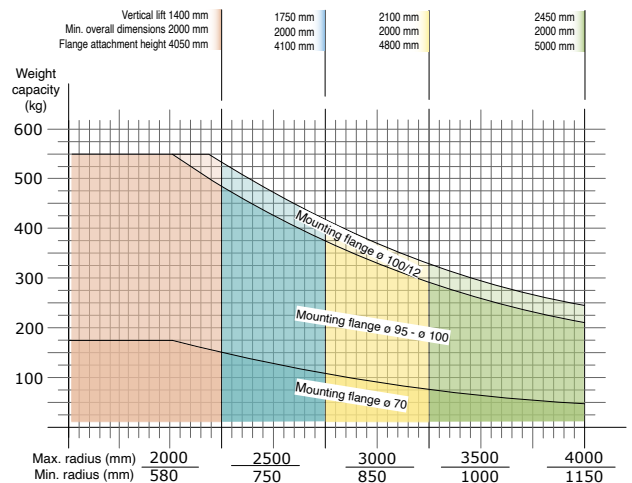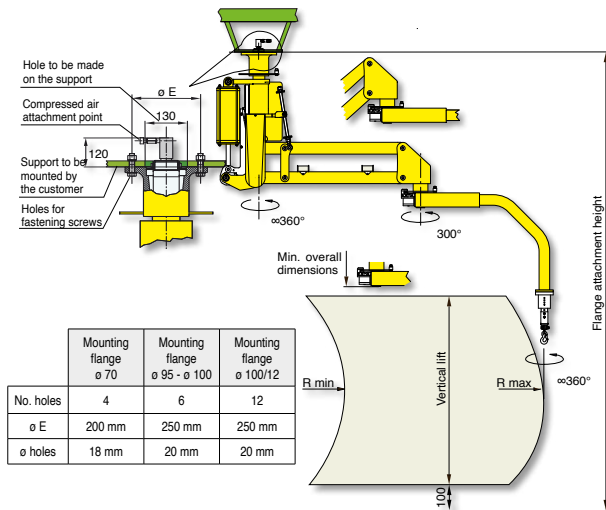

Partner overhead trolley mounted - PES

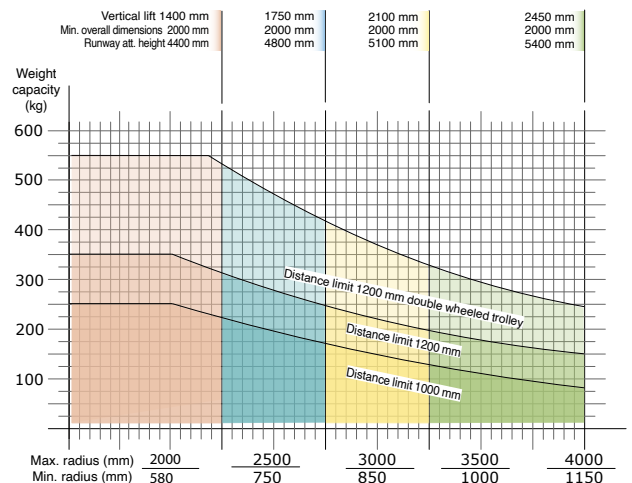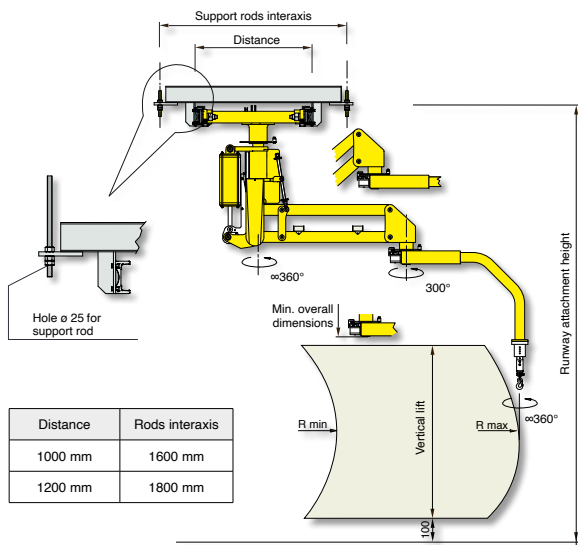

Air supply: dry and oil-free compressed air min. constant 0.7-0.8 MPa