




WEIGHT
CAPACITY
140 Kg



RADIUS
5000 mm

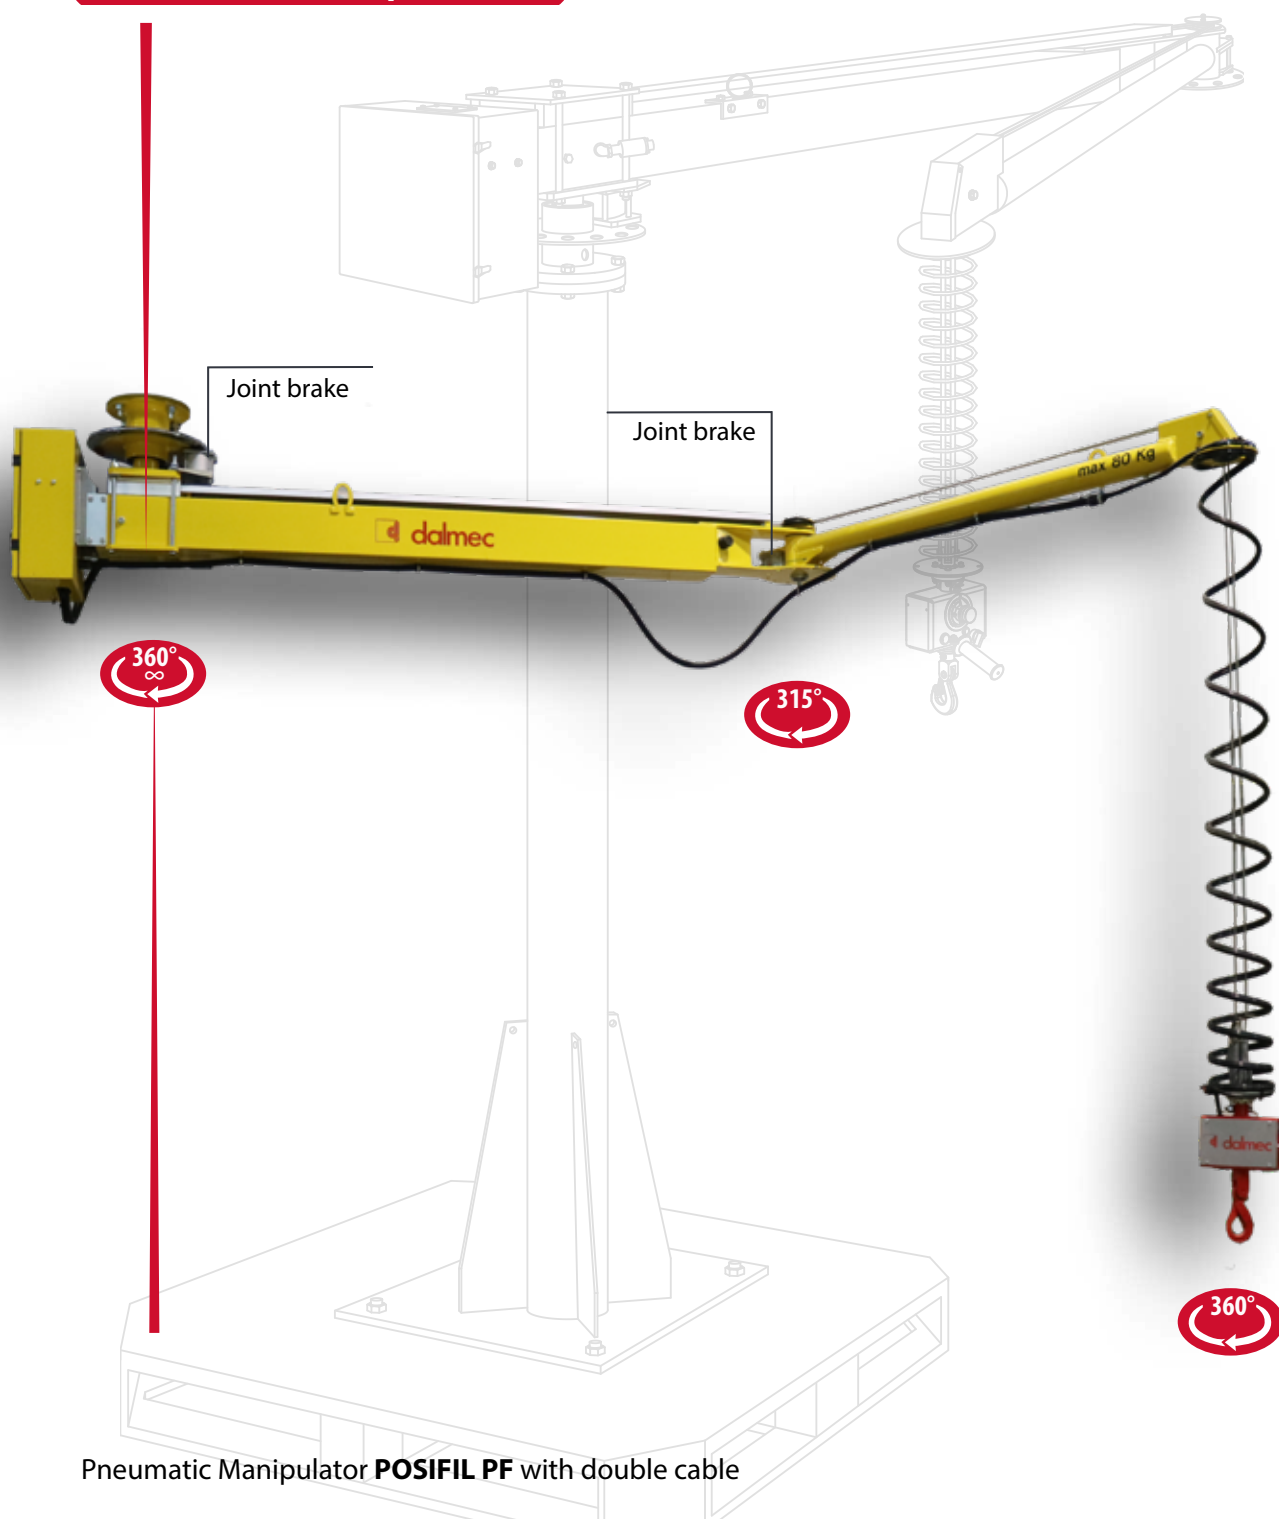

PRESSURE
0.7-0.8 Mpa



VERTICAL LIFT
1800 mm




VERSIONS
COLUMN
FIXED
OVERHEAD
RUNNING
OVERHEAD

Pneumatic Manipulator **POSIFIL PF** with double cable


POSIFIL PF, equipped with special gripping tools, allows to handle loads in a weightless condition in any direction. The gripping tool is connected to the balancing group through two single steel cables to guarantee max safety. The particular double arm structure and middle joint makes it easy to operate within the entire working area.

POSIFIL[®] - PF



Posifil column mounted - PFC

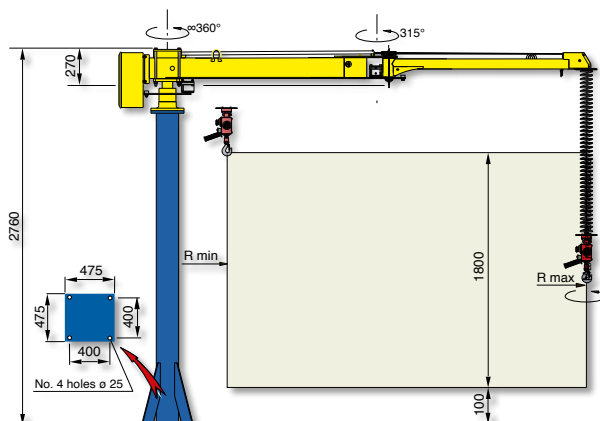

Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned.


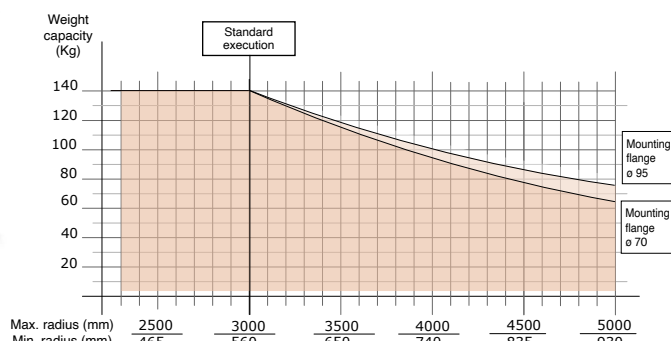


Posifil overhead mounted - PFF

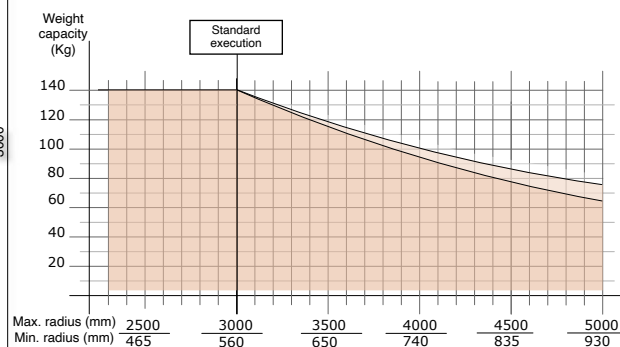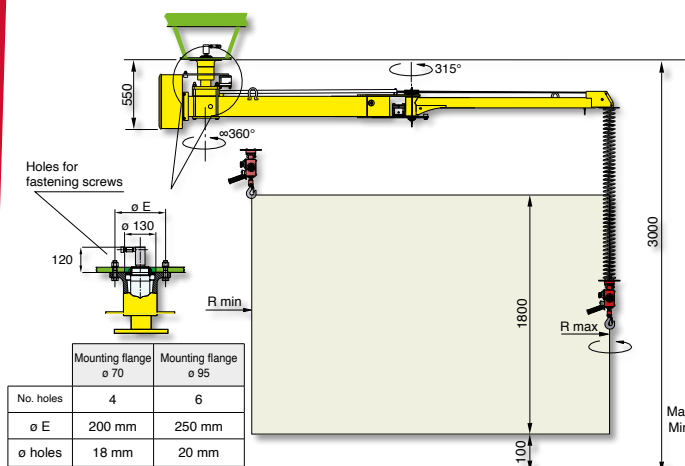

Configuration and measurements may change upon the Customer's specific requirements

Posifil overhead trolley mounted - PFS

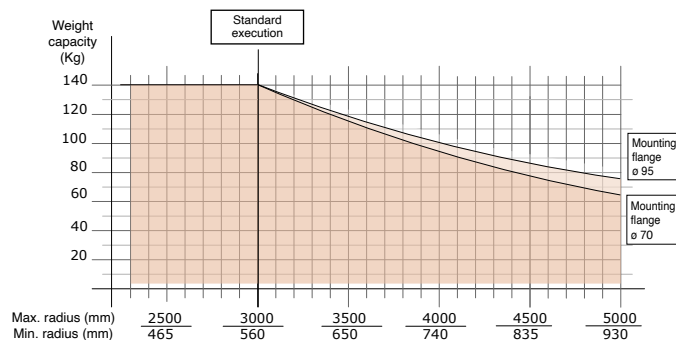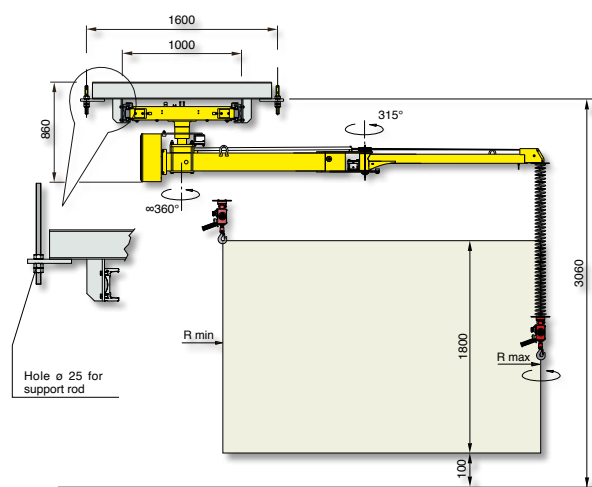

Air supply: dry and oil-free compressed air min. constant 0.7÷0.8 MPa