


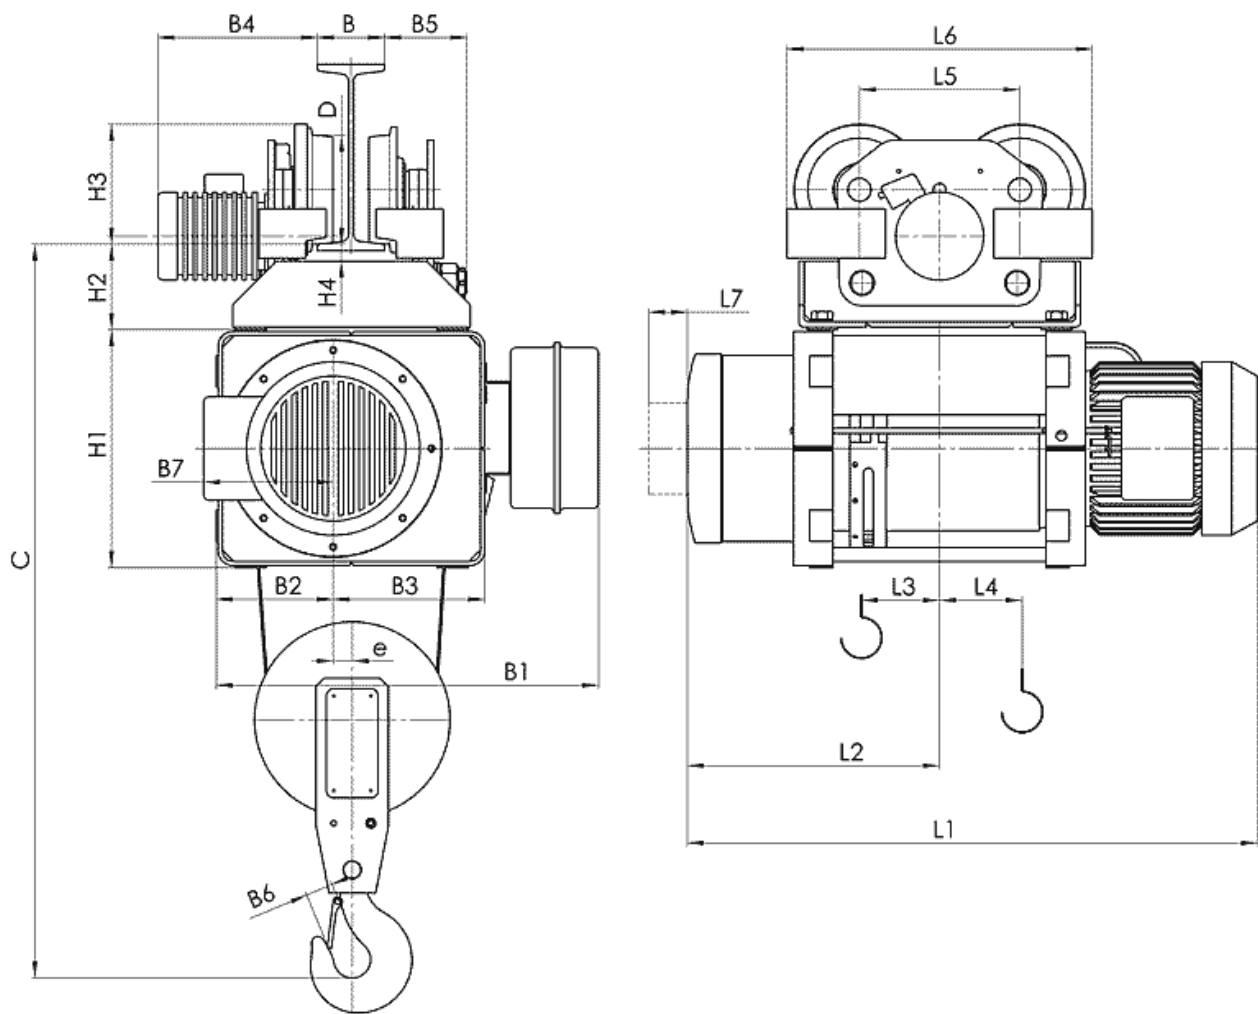

Канатный электротельфер МТ Передвигаемый одной тележкой, полиспаст 2/1

(1) с микроподъемом

(2) с ограничителем груза

Тип	Полиспаст 2/1		Скорость подъема, m/min		Размеры, mm																					
	Высота подъема, m	Грузоподъем- ность, kg	8 12	8/1 12/2	L2	L3	L4	L5	L6	L7	H1	H2	H3	H4	B	B1	B2	B3	B4	B5	B6	B7	C	e	D	
			L1																							
MT202	H1	6	500	648	688	287	32	35	225	415	70	317	118	148	33	90... 130	560 625 ⁽²⁾	158.5	239.5 302 ⁽²⁾	245... 305	94... 54	34	165 192 ⁽¹⁾	990	50	120
	H2	10		738	778	332	77	35																		
	H3	14		818	858	373	77	75																		
MT305	H1	6	1000	709	749	310	45	42	225	415	70	317	118	148	33	90... 130	560 625 ⁽²⁾	158.5	239.5 302 ⁽²⁾	245... 305	94... 54	40	165 198 ⁽¹⁾	1060	50	120
	H2	10		814	854	362	98	42																		
	H3	13		914	954	412	98	92																		
MT410	H1	5.5	2000	816	880	362	40	40	280	536	80	380	153	200	42	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	270... 335	125... 105	45	172 220 ⁽¹⁾	1250	36	175
	H2	9		926	990	417	95	40																		
	H3	12		1026	1090	467	95	90																		
MT516	H1	5.5	3200	856	923	377	50	45	280	536	80	380	153	200	42	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	270... 335	125... 105	50	172 226 ⁽¹⁾	1330	34	175
	H2	9		976	1043	437	110	45																		
	H3	12		1086	1153	492	115	95																		
MT625	H1	4.5	5000	905	993	395	40	38	310	595	90	466	165	232	33	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	300... 365	145... 125	56	212 257 ⁽¹⁾	1520	37	210
	H2	8		1010	1098	448	92	38																		
	H3	11		1115	1203	500	95	88																		

Тип	Полиспаст 2/1			Скорость подъема, m/min			
	Высота подъема, m	Скорость подъема, m/min		8	12	8/2	12/2
				Вес, kg			
MT202	H1	6	500	130		147	
	H2	10		135		152	
	H3	14		140		157	
MT305	H1	6	1000	150		174	
	H2	10		157		179	
	H3	13		166		188	
MT410	H1	5.5	2000	280		323	
	H2	9		295		338	
	H3	12		315		358	
MT516	H1	5.5	3200	310	320	375	
	H2	9		325	335	390	
	H3	12		345	355	405	
MT625	H1	4.5	5000	550		610	
	H2	8		575		635	
	H3	11		600		660	