




WEIGHT
CAPACITY
900 kg



RADIUS
4500 mm

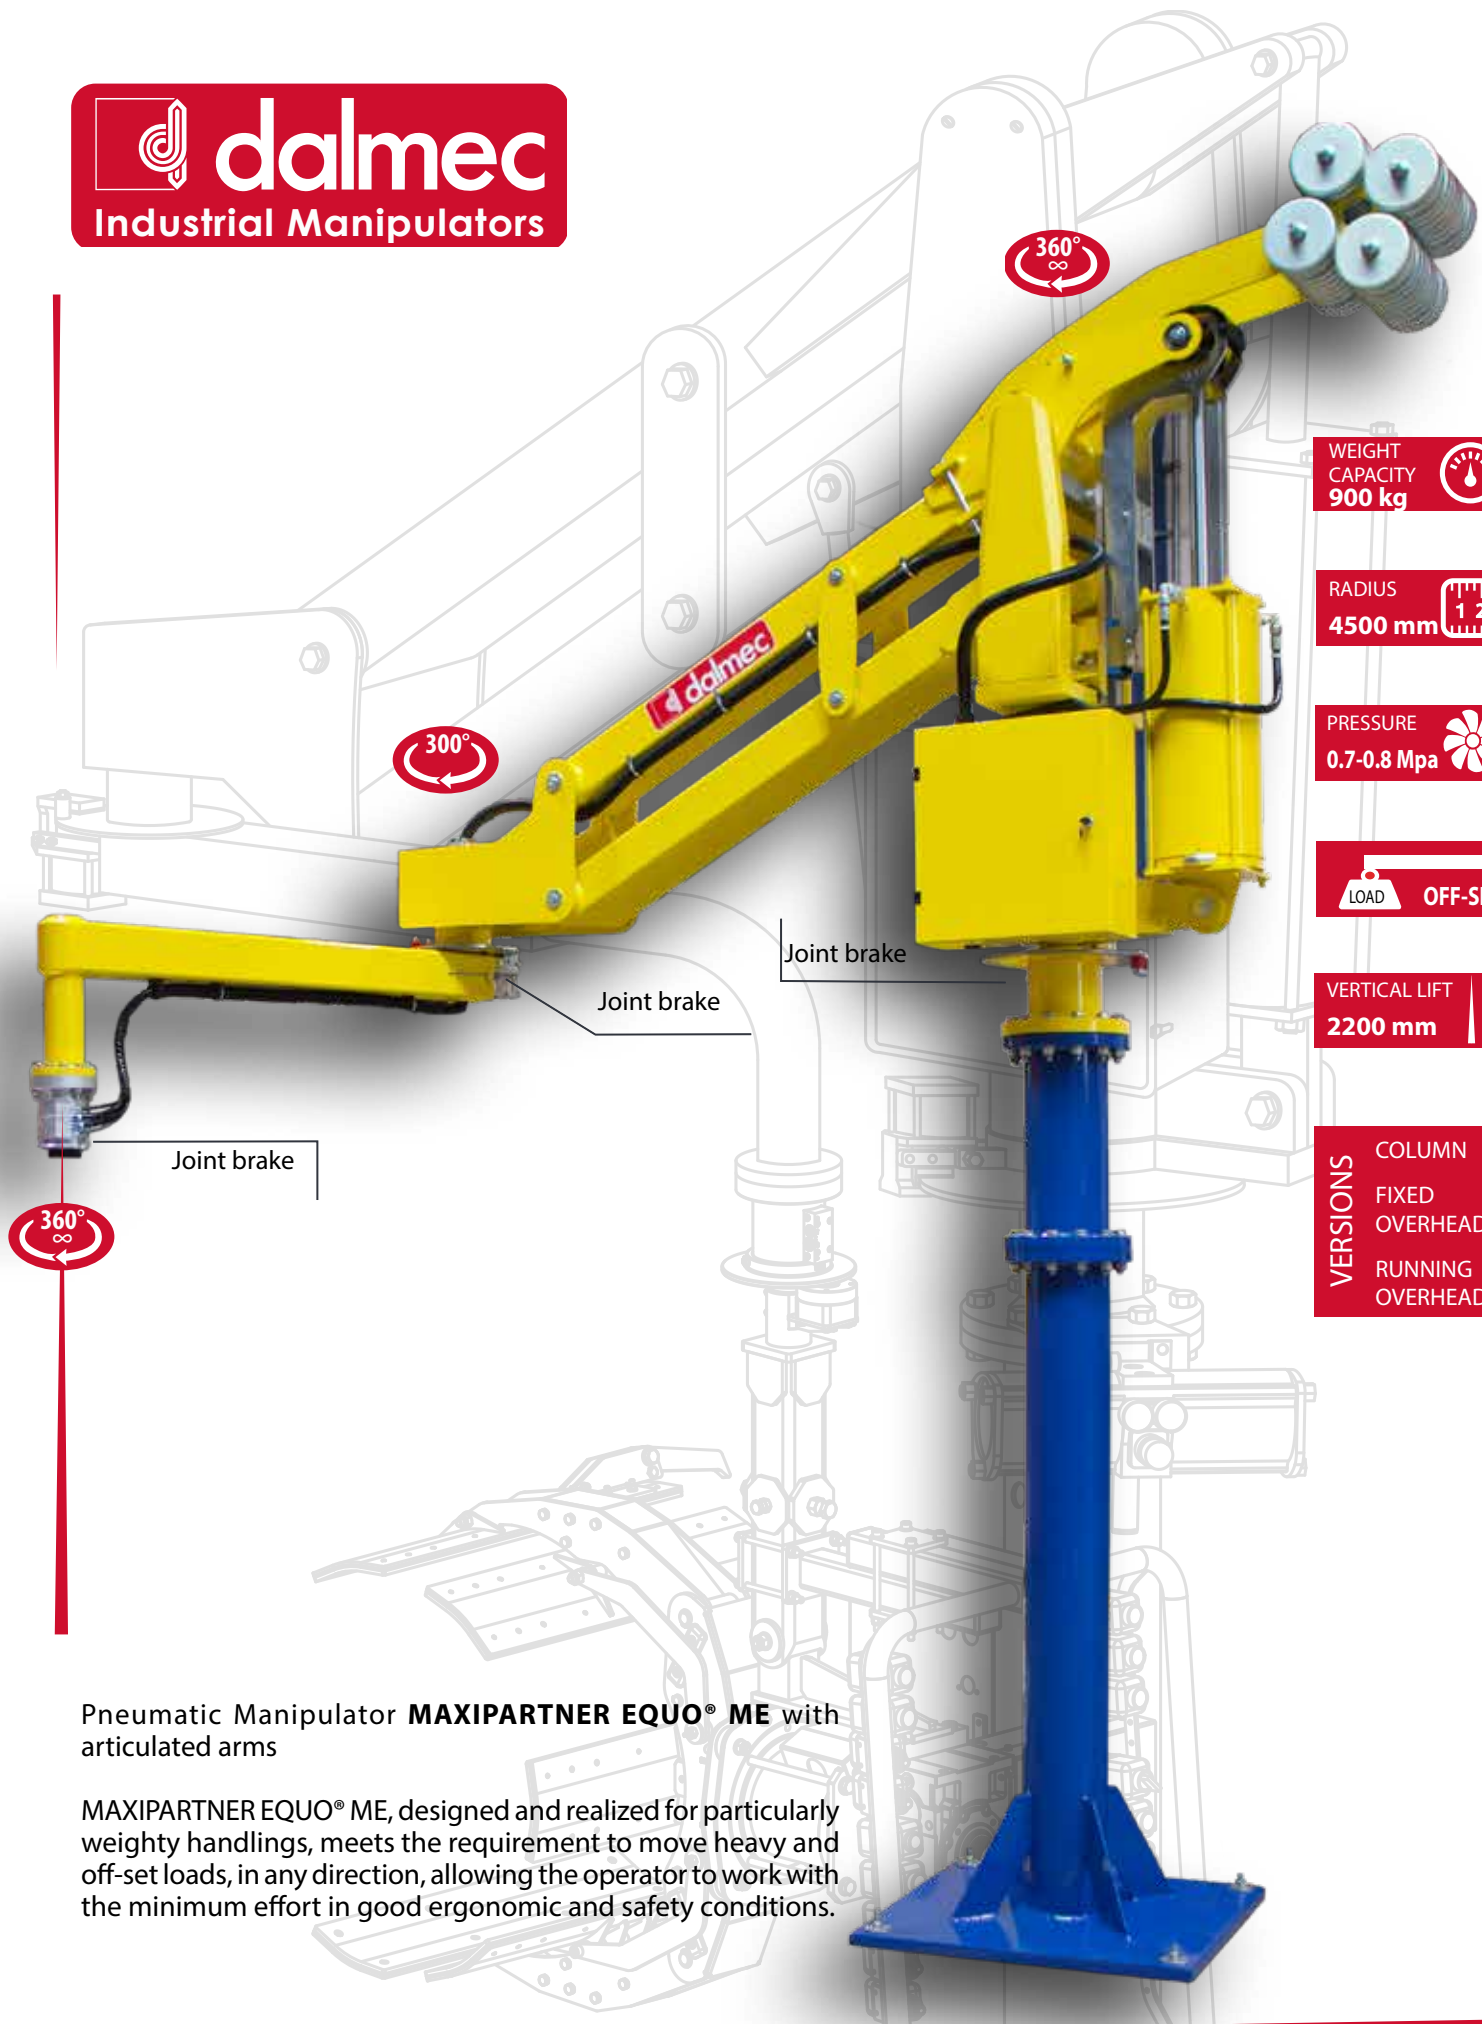

PRESSURE
0.7-0.8 Mpa



LOAD

OFF-SET

VERTICAL LIFT
2200 mm



VERSIONS
COLUMN
FIXED
OVERHEAD
RUNNING
OVERHEAD


Pneumatic Manipulator **MAXIPARTNER EQUO® ME** with articulated arms

MAXIPARTNER EQUO® ME, designed and realized for particularly weighty handlings, meets the requirement to move heavy and off-set loads, in any direction, allowing the operator to work with the minimum effort in good ergonomic and safety conditions.


MAXIPARTNER EQUO® - ME

MAXIPARTNER EQUO® - ME



Maxipartner Equo® column mounted - MEC

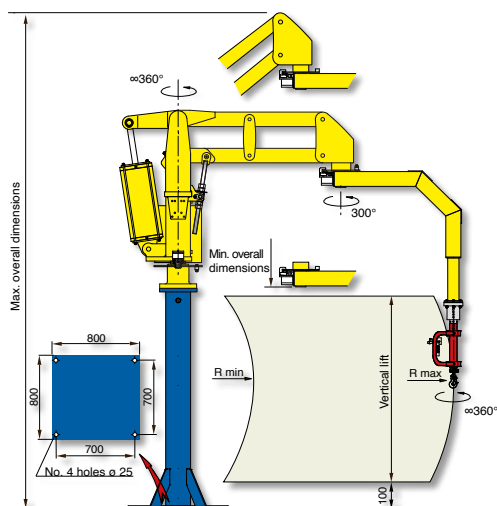


Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned or with autostable motorised trolley that translates on a simple profile track on the floor.

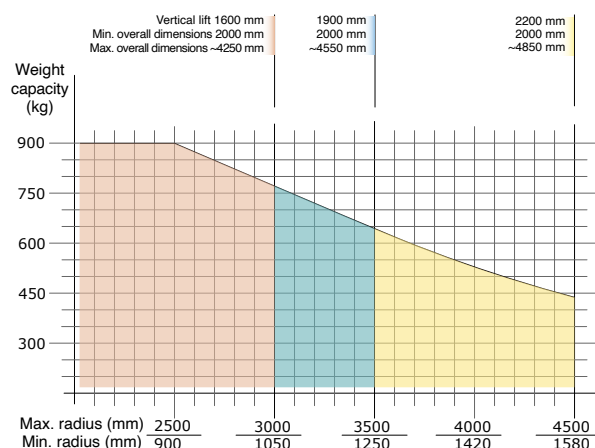


Maxipartner Equo® overhead mounted - MEF

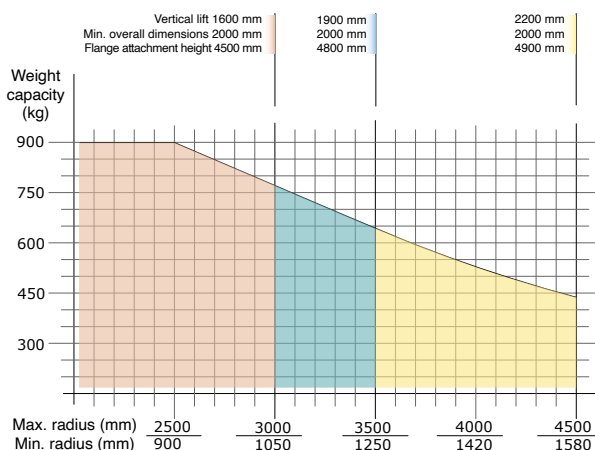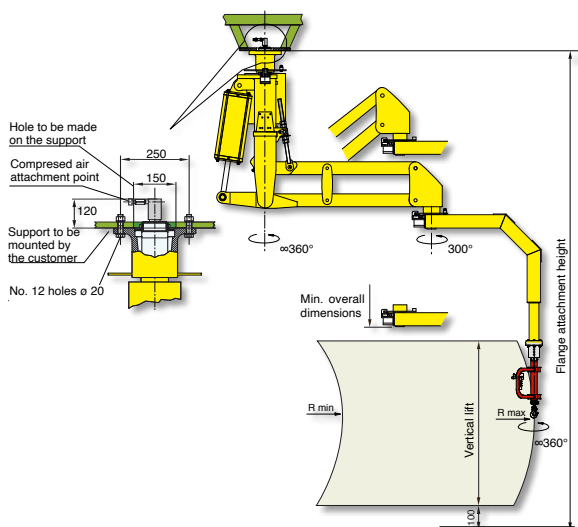

Maxipartner Equo® overhead trolley mounted - MES

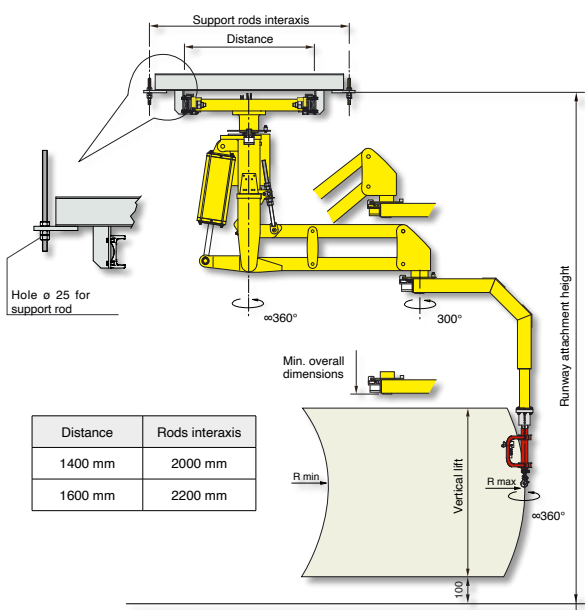

Distance	Rods interaxis
1400 mm	2000 mm
1600 mm	2200 mm

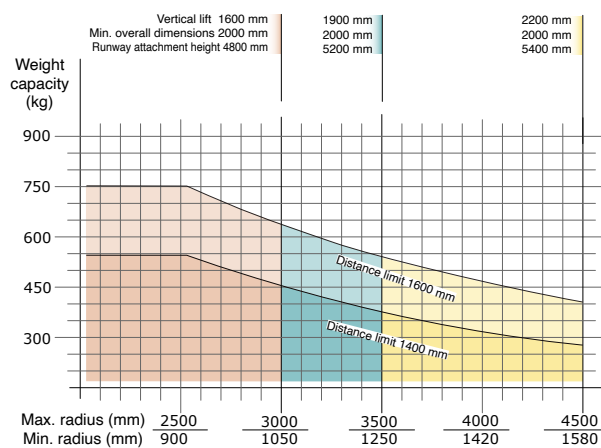

Air supply: dry and oil-free compressed air min. constant 0.7÷0.8 MPa