


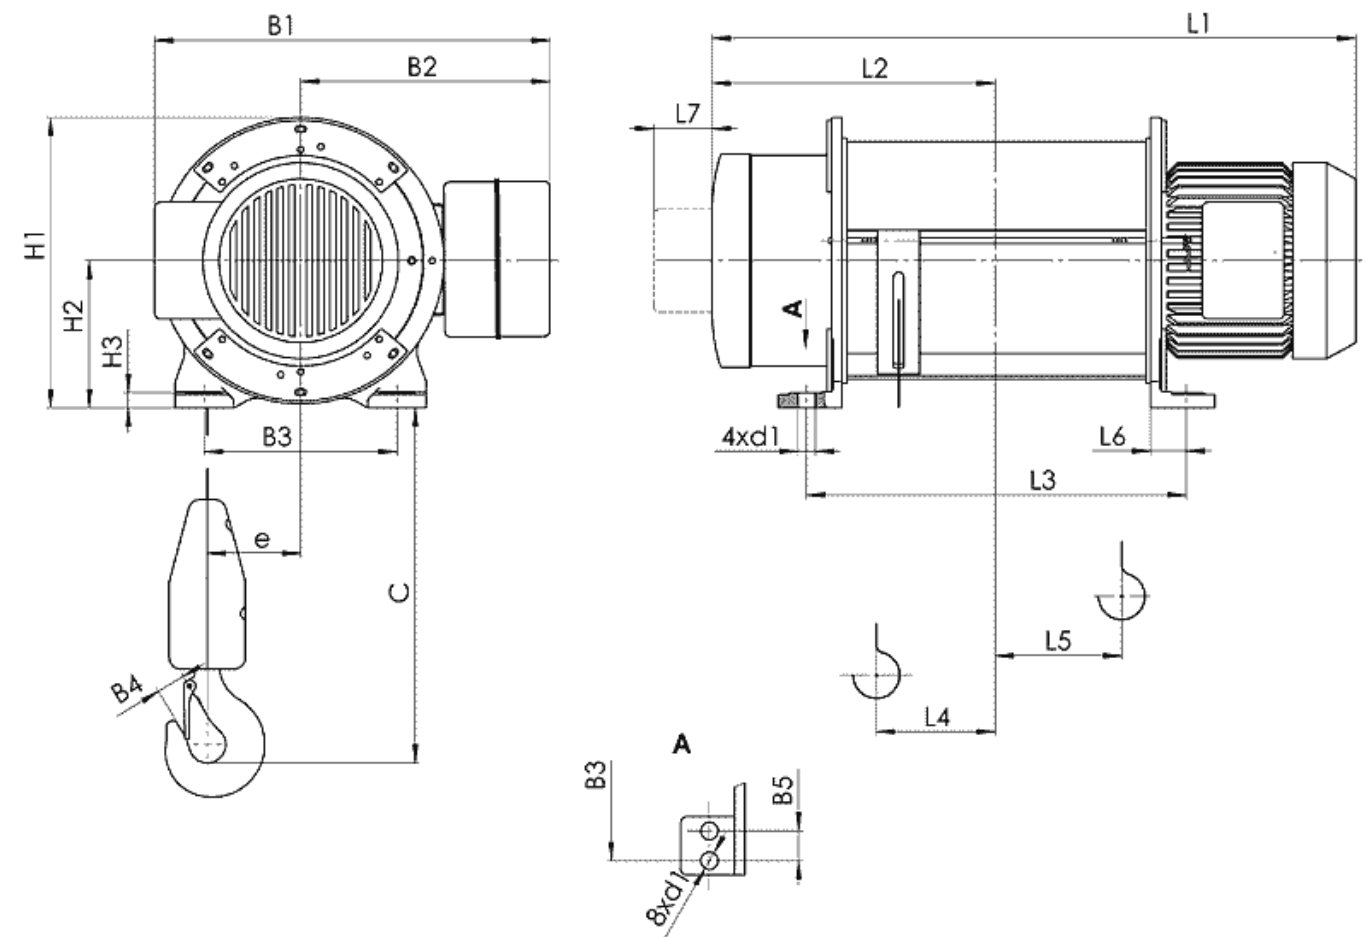

Канатный электротельфер Т17 Стационарный (подвесной) на лапах, полиспаст 1/1

(1) с микроподъемом

Тип	Полиспаст 1/1		Размеры, mm																										
	Высота подъема, m	Грузопо- дъемность, kg	Скорость подъема m/min				L2	L3	L4	L5	L6	L7	H1	H2	H3	B1	B2	B3	B4	B5	e	C	d1						
			16	24	16/4	24/4																							
			L1																										
T172...	H1	12	250	648		688		287	320	81	81	46	70	310	157	17	465 492 ⁽¹⁾	300	200	34	-	90	330	21					
	H2	18		738		778		332	410	126	126																		
	H3	24		818		858		373	490	166	166																		
	H4	36		978		1018		452	650	246	246	55	80	402	202	22	580 606 ⁽¹⁾	380	270	34	-	128	330	26					
	H5	48		1138		1178		532	810	326	326																		
	H6	60		1226		1290		567	804	259	259																		
	H7	72		1306		1373		602	874	332	332																		
T173...	H1	12	500	709		749		310	365	101	101	46	70	310	157	17	465 492 ⁽¹⁾	300	200	40	-	90	400	21					
	H2	18		814		854		362	470	154	154																		
	H3	24		914		954		412	570	204	204																		
	H4	36		1114		1154		512	770	304	304	55	80	402	202	22	675 682 ⁽¹⁾	430	270	40	-	128	400	26					
	H5	48		1314		1354		612	970	404	404																		
	H6	60		1426		1490		667	1004	459	459																		
	H7	72		1526		1593		712	1094	442	442																		
T174...	H1	12	1000	816		880		362	394	94	94	55	80	402	202	22	580 606 ⁽¹⁾	380	270	45	-	128	450	26					
	H2	18		926		990		417	504	149	149																		
	H3	24		1026		1090		467	604	159	159																		
	H4	36		1226		1290		567	804	259	259	63	90	497	252	30	675 682 ⁽¹⁾	430	330	45	-	160	450	30					
	H5	48		1426		1490		667	1004	459	459																		
	H6	60		1535		1623		710	1070	410	410																		
	H7	72		1640		1728		762	1175	462	462																		
T175...	H1	12	1600	856		923		377	424	106	106	55	80	402	202	22	580 606 ⁽¹⁾	380	270	50	-	130	525	26					
	H2	18		976		1043		437	544	166	166																		

	H3	24		1086	1153	492	654	222	222	63	90	497	252	26	675 682 ⁽¹⁾	430	330	50	-	160	525	30
	H4	36		1306	1373	602	874	332	332													
	H5	48		1526	1593	712	1094	442	442													
	H6	60		1640	1728	762	1175	462	462													
	H7	72		1815	1903	850	1350	550	550													
T176...	H1	12	2500	905	993	395	440	96	96	63	90	497	252	26	675 682 ⁽¹⁾	430	330	56	-	160	550	30
	H2	18		1010	1098	448	545	149	149													
	H3	24		1115	1203	500	650	200	200													
	H4	36		1325	1413	605	860	305	305													
	H5	48		1535	1623	710	1070	410	410													
	H6	60		1815	1903	850	1350	550	550													
	H7	72		1963	1969	905	1433	562	562													
T177...	H2	18	4000	1133	1168	507	638	165	165	84	100	585	300	32	765	470	460	71	82	180	905	28
	H3	24		1293	1328	587	798	245	245													
	H4	36		1453	1488	667	958	325	325													
	H5	48		1668	1703	775	1173	432	432													
	H6	60		1883	1918	882	1388	540	540													
	H7	72		2093	2128	987	1598	645	645													

Тип	Полиспаст 1/1		Размеры, mm																			
	Высота подъема, m		Грузопо- дъемность, kg	Скорость подъема m/min		L2	L3	L4	L5	L6	L7	H1	H2	H3	B1	B2	B3	B4	B5	e	C	d1
				32	32/5.3																	
				L1																		
T172...	H4	36	250	1026	1090	467	604	159	159	55	80	402	202	22	580 606 ⁽¹⁾	380	270	34	-	128	330	26
	H5	48		1086	1153	492	654	222	222													
	H6	60		1226	1290	567	804	259	259													
	H7	72		1306	1373	602	874	332	332													
T173...	H4	36	500	1086	1153	492	654	222	222	55	80	402	202	22	675 682 ⁽¹⁾	430	270	40	-	128	400	26
	H5	48		1226	1290	567	804	259	259													
	H6	60		1426	1490	667	1004	459	459													
	H7	72		1526	1590	712	1094	442	442													
T174...	H5	48	1000	1325	1413	605	860	305	305	63	90	497	252	30	675 682 ⁽¹⁾	430	330	45	-	160	450	30
	H6	60		1535	1623	710	1070	410	410													
	H7	72		1640	1728	762	1175	462	462													
T175...	H4	48	1600	1325	1413	605	860	305	305	63	90	497	252	26	675 682 ⁽¹⁾	430	330	50	-	160	525	30
	H5	60		1535	1623	710	1070	410	410													
	H6	72		1640	1728	762	1175	462	462													
	H7	96		1815	1903	850	1350	550	550													
T176...	H4	18	2500	1488	1494	667	958	325	325	84	100	585	300	32	765	470	460	56	82	180	550	28
	H5	24		1588	1594	717	1058	375	375													
	H6	36		1778	1784	812	1248	470	470													
	H7	96		1963	1969	905	1433	562	562													
T177...	H2	18	4000	1168	1174	507	638	165	165	84	100	585	300	32	765	470	460	56	82	180	905	28
	H3	24		1328	1334	587	798	245	245													
	H4	36		1488	1494	667	958	325	325													
	H5	48		1703	1709	775	1173	432	432													
	H6	60		1918	1924	882	1388	540	540													
	H7	72		2128	2134	987	1598	645	645													

Тип	Полиспаст 1/1		Скорость подъема m/min						
	Высота подъема, m	Грузопо- дъемность, kg	16	24	16/4	24/4	32	32/5.3	
			Вес, kg						
T172...	H1	12	250	95		113		-	-
	H2	18		100		118		-	-
	H3	24		105		123		-	-
	H4	36		119		137		226	272
	H5	48		128		146		244	290
	H6	60		250		297		251	297
	H7	72		273		320		274	320
T173...	H1	12	500	107		130		-	-
	H2	18		115		138		-	-
	H3	24		124		147		-	-
	H4	36		137		160		247	293
	H5	48		149		172		263	309
	H6	60		286		333		287	333
	H7	72		306		353		307	353
T174...	H1	12	1000	207		253		-	-
	H2	18		222		268		-	-
	H3	24		232		278		-	-
	H4	36		267		313		-	-
	H5	48		292		338		486	541
	H6	60		526		581		526	581
	H7	72		546		601		546	601
T175...	H1	12	1600	240	250	305		-	-
	H2	18		255	265	320		-	-
	H3	24		270	280	335		-	-
	H4	36		310	320	375		490	545
	H5	48		340	350	405		535	590
	H6	60		525	565	620		565	620
	H7	72		550	590	645		590	645
T176...	H1	12	2500	360		455		-	-
	H2	18		380		475		-	-
	H3	24		400		495		-	-
	H4	36		460		555		818	823
	H5	48		510		605		838	843
	H6	60		570		665		860	865
	H7	72		840		900		900	905
T177...	H2	18	4000	660		720		720	725
	H3	24		700		760		760	765
	H4	36		765		825		825	830
	H5	48		825		885		885	890
	H6	60		880		940		940	945
	H7	72		940		1000		1000	1005