


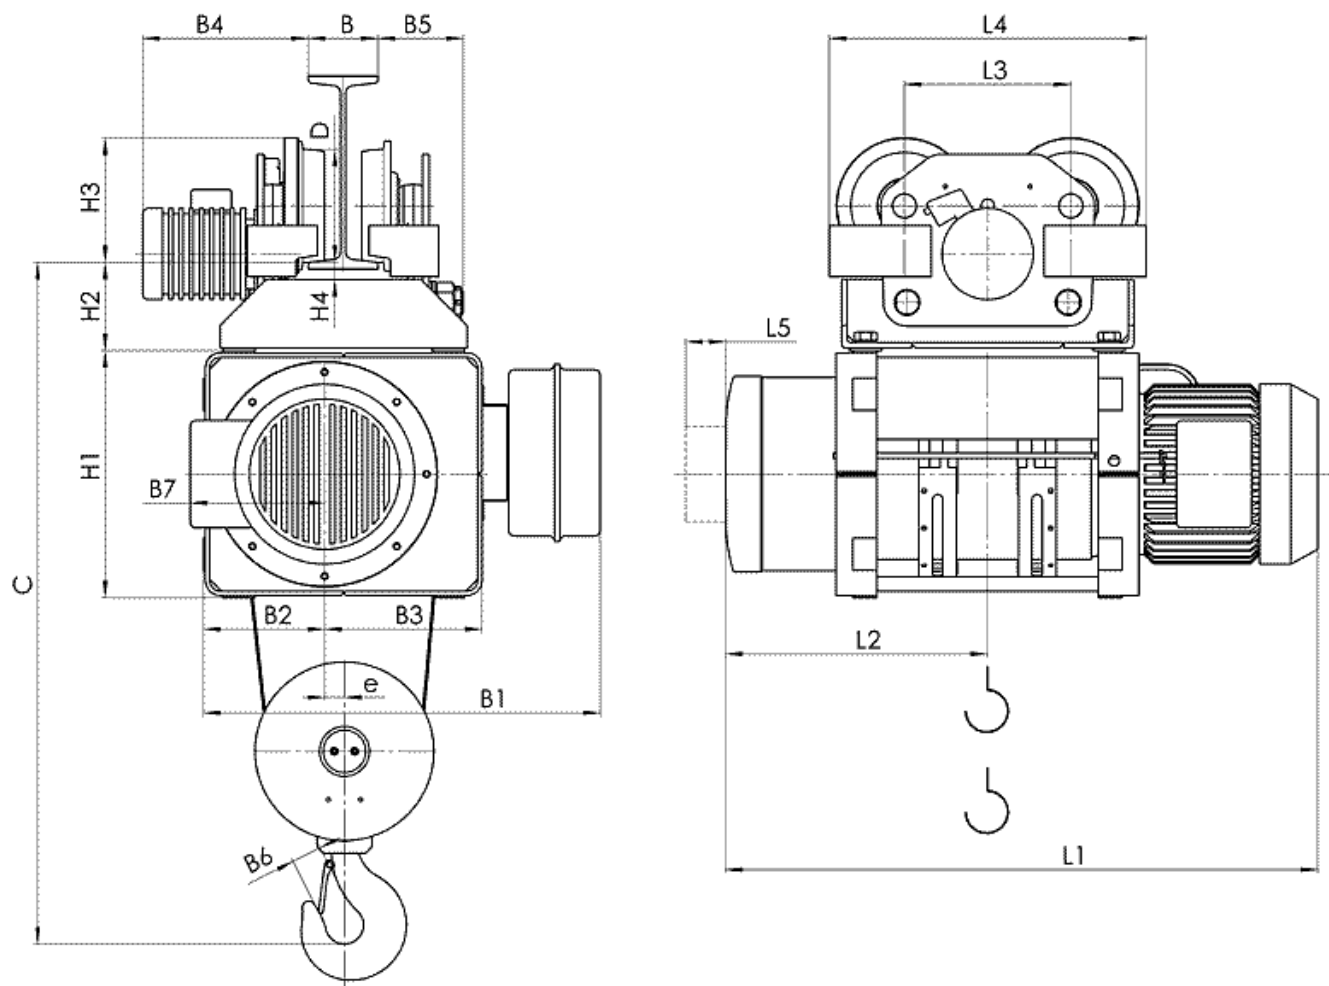

Канатный электротельфер МТ Передвигаемый одной тележкой, полиспаст 4/2

(1) с микроподъемом

(2) с ограничителем груза

Тип	Полиспаст 4/2			Размеры, mm																				
	Высота подъема, m		Грузоподъем- ность, kg	Скорость подъема, m/min		L2	L3	L4	L5	H1	H2	H3	H4	B	B1	B2	B3	B4	B5	B6	B7	C	e	D
				8 12	8/1 12/2																			
				L1																				
MT305	H3	6.5	1000	914	954	412	225	415	70	317	118	148	33	90... 130	560 625 ⁽²⁾	158.5	239.5 302 ⁽²⁾	245... 305	94... 54	40	165 198 ⁽¹⁾	955	50	120
MT410	H3	6	2000	1026	1090	467	280	536	80	380	153	200	42	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	270... 335	125... 105	45	172 220 ⁽¹⁾	1100	36	175
MT516	H3	5	3200	1086	1153	492	280	536	80	380	153	200	42	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	270... 335	125... 105	50	172 226 ⁽¹⁾	1180	34	175
MT625	H3	3.5	5000	1115	1203	500	310	595	90	466	165	232	33	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	300... 365	145... 125	56	212 257 ⁽¹⁾	1350	37	210

Тип	Полиспаст 4/2			Скорость			
	Высота подъема, m		Грузоподъем- ность, kg	подъема, m/min			
				8	12	8/2	12/2
				Вес, kg			
MT305	H3	6.5	1000	180		202	
MT410	H3	6	2000	355		378	
MT516	H3	5	3200	395	405	455	
MT625	H3	3.5	5000	700		760	