


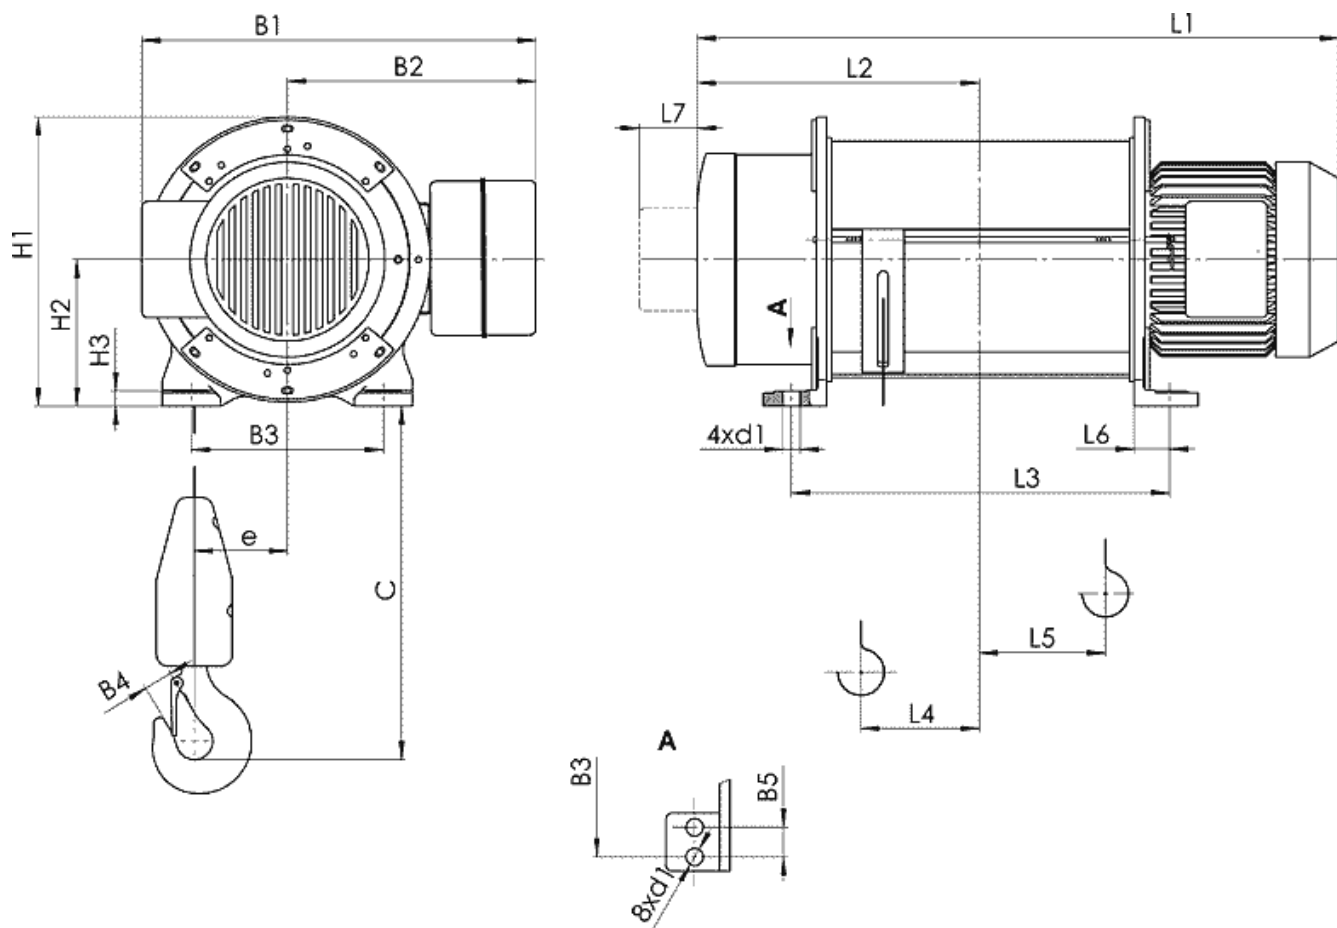

Канатний електротельфер Т17 Стационарний (підвісний) на лапах, поліспаст 1/1

(1) з мікроліфтом

Тип	Поліснаст 1/1		Розміри, мм																				
	Висота підйому, m	Вантажопідйомність, kg	Швидкість підйому m/min				L2	L3	L 4	L5	L6	L7	H1	H2	H3	B1	B2	B3	B4	B5	i	C	d1
			16	24	16/4	24/4																	
			L1																				
T172...	H1	12	250	648	688	287	320	81	81	46	70	310	157	17	465 492 (1)	300	200	34	-	90	330	21	
	H2	18		738	778	332	410	126	126														
	H3	24		818	858	373	490	166	166														
	H4	36		978	1018	452	650	246	246														
	H5	48		1138	1178	532	810	326	326	55	80	402	202	22	580 606 (1)	380	270	34	-	128	330	26	
	H6	60		1226	1290	567	804	259	259														
	H7	72		1306	1373	602	874	332	332														
T173...	H1	12	500	709	749	310	365	101	101	46	70	310	157	17	465 492 (1)	300	200	40	-	90	400	21	
	H2	18		814	854	362	470	154	154														
	H3	24		914	954	412	570	204	204														
	H4	36		1114	1154	512	770	304	304														
	H5	48		1314	1354	612	970	404	404	55	80	402	202	22	675 682 (1)	430	270	40	-	128	400	26	
	H6	60		1426	1490	667	1004	459	459														
	H7	72		1526	1593	712	1094	442	442														
T174...	H1	12	1000	816	880	362	394	94	94	55	80	402	202	22	580 606 (1)	380	270	45	-	128	450	26	
	H2	18 років		926	990	417	504	149	149														
	H3	24		1026	1090	467	604	159	159														
	H4	36		1226	1290	567	804	259	259														
	H5	48		1426	1490	667	1004	459	459														

	H6	60		1535	1623	710	1070	410	410	63	90	497	252	30	675 682 (1)	430	330	45	-	160	450	30
	H7	72		1640	1728	762	1175	462	462						682 (1)							
T175...	H1	12	1600	856	923	377	424	106	106	55	80	402	202	22	580 606 (1)	380	270	50	-	130	525	26
	H2	18		976	1043	437	544	166	166													
	H3	24		1086	1153	492	654	222	222													
	H4	36		1306	1373	602	874	332	332													
	H5	48		1526	1593	712	1094	442	442													
	H6	60		1640	1728	762	1175	462	462	63	90	497	252	26	675 682 (1)	430	330	50	-	160	525	30
	H7	72		1815	1903	850	1350	550	550													
T176...	H1	12	2500	905	993	395	440	96	96	63	90	497	252	26	675 682 (1)	430	330	56	-	160	550	30
	H2	18		1010	1098	448	545	149	149													
	H3	24		1115	1203	500	650	200	200													
	H4	36		1325	1413	605	860	305	305													
	H5	48		1535	1623	710	1070	410	410													
	H6	60		1815	1903	850	1350	550	550	84	100	585	300	32	765	470	460	56	82	180	550	28
	H7	72		1963	1969	905	1433	562	562													
T177...	H2	18 років	4000	1133	1168	507	638	165	165	84	100	585	300	32	765	470	460	71	82	180	905	28
	H3	24		1293	1328	587	798	245	245													
	H4	36		1453	1488	667	958	325	325													
	H5	48		1668	1703	775	1173	432	432													
	H6	60		1883	1918	882	1388	540	540													
	H7	72		2093	2128	987	1598	645	645													

Тип	Поліспаст 1/1		Розміри, мм																			
	Висота підйому, m	Вантажопідйомність, kg	Швидкість підйому m/min		Л2	Л3	Л4	Л5	Л6	Л7	Н1	Н2	Н3	В1	В2	В3	В4	В5	e	C	d1	
			32	32/5.3																		
			L1																			
T172...	H4	36	250	1026	1090	467	604	159	159	55	80	402	202	22	580 606 (1)	380	270	34	-	128	330	26
	H5	48		1086	1153	492	654	222	222													
	H6	60		1226	1290	567	804	259	259													
	H7	72		1306	1373	602	874	332	332													
T173...	H4	36	500	1086	1153	492	654	222	222	55	80	402	202	22	675 682 (1)	430	270	40	-	128	400	26
	H5	48		1226	1290	567	804	259	259													
	H6	60		1426	1490	667	1004	459	459													
	H7	72		1526	1590	712	1094	442	442													
T174...	H5	48	1000	1325	1413	605	860	305	305	63	90	497	252	30	675 682 (1)	430	330	45	-	160	450	30
	H6	60		1535	1623	710	1070	410	410													
	H7	72		1640	1728	762	1175	462	462													
T175...	H4	48	1600	1325	1413	605	860	305	305	63	90	497	252	26	675 682 (1)	430	330	50	-	160	525	30
	H5	60		1535	1623	710	1070	410	410													
	H6	72		1640	1728	762	1175	462	462													
	H7	96		1815	1903	850	1350	550	550													
T176...	H4	18	2500	1488	1494	667	958	325	325	84	100	585	300	32	765	470	460	56	82	180	550	28
	H5	24		1588	1594	717	1058	375	375													
	H6	36		1778	1784	812	1248	470	470													
	H7	96		1963	1969	905	1433	562	562													
T177...	H2	18	4000	1168	1174	507	638	165	165	84	100	585	300	32	765	470	460	56	82	180	905	28
	H3	24		1328	1334	587	798	245	245													
	H4	36		1488	1494	667	958	325	325													
	H5	48		1703	1709	775	1173	432	432													
	H6	60		1918	1924	882	1388	540	540													
	H7	72		2128	2134	987	1598	645	645													

Тип	Поліспаст 1/1		Швидкість підйому m/min						
	Висота підйому, m	Вантажопідйомність , kg	16	24	16/4	Цілодобово	32	32/5.3	
			Вага, кг						
T172...	H1	12	250	95		113		-	-
	H2	18 років		100		118		-	-
	H3	24		105		123		-	-
	H4	36		119		137		226	272
	H5	48		128		146		244	290
	H6	60		250		297		251	297
	H7	72		273		320		274	320
T173...	H1	12	500	107		130		-	-
	H2	18 років		115		138		-	-
	H3	24		124		147		-	-
	H4	36		137		160		247	293
	H5	48		149		172		263	309
	H6	60		286		333		287	333
	H7	72		306		353		307	353
T174...	H1	12	1000	207		253		-	-
	H2	18 років		222		268		-	-
	H3	24		232		278		-	-
	H4	36		267		313		-	-
	H5	48		292		338		486	541
	H6	60		526		581		526	581
	H7	72		546		601		546	601
T175...	H1	12	1600	240	250	305		-	-
	H2	18 років		255	265	320		-	-
	H3	24		270	280	335		-	-
	H4	36		310	320	375		490	545
	H5	48		340	350	405		535	590
	H6	60		525	565	620		565	620
	H7	72		550	590	645		590	645
T176...	H1	12	2500	360		455		-	-
	H2	18 років		380		475		-	-
	H3	24		400		495		-	-
	H4	36		460		555		818	823
	H5	48		510		605		838	843
	H6	60		570		665		860	865
	H7	72		840		900		900	905
T177...	H2	18 років	4000	660		720		720	725
	H3	24		700		760		760	765
	H4	36		765		825		825	830
	H5	48		825		885		885	890
	H6	60		880		940		940	945
	H7	72		940		1000		1000	1005