


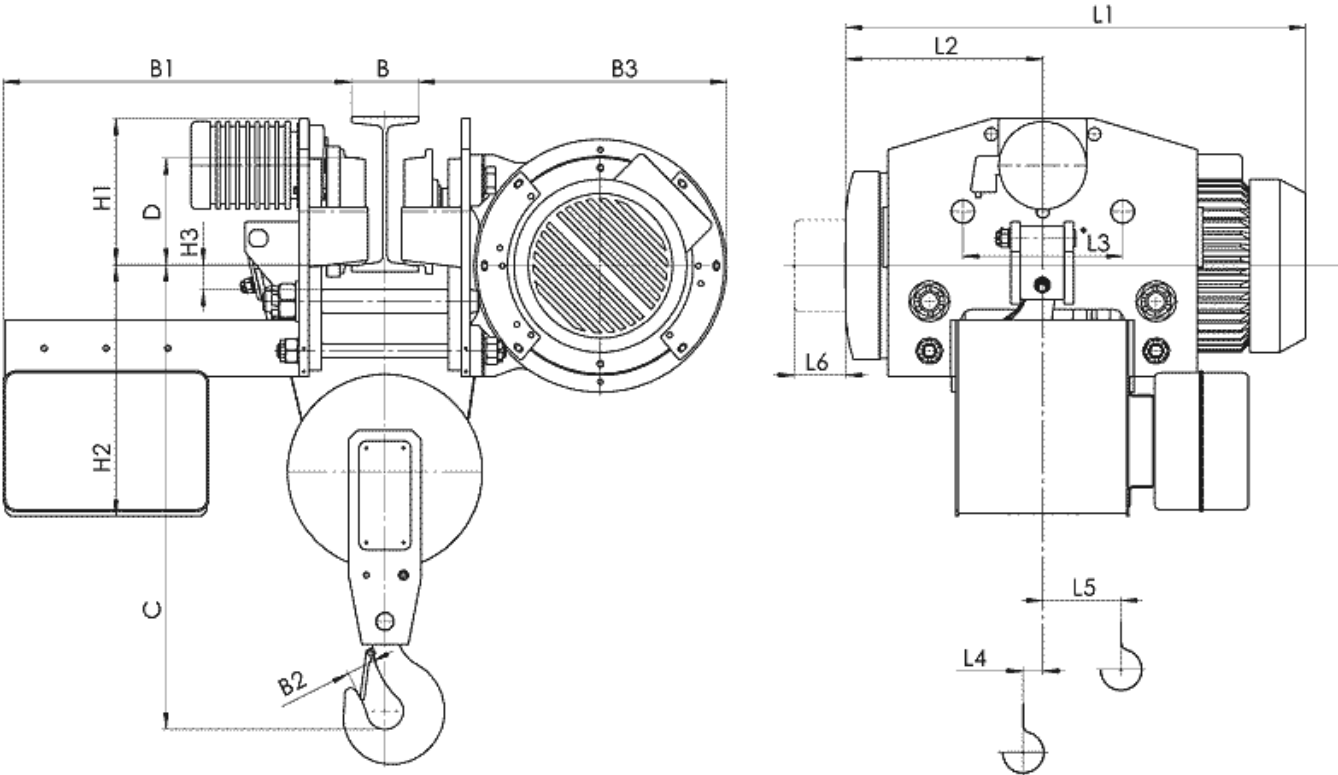

Канатный электротельфер Т45 Уменьшенная строительная высота, полиспаст 2/1

Тип	Полиспаст 2/1		Размеры, mm																		
	Высота подъема, m	Грузопо- дъемность, kg	Скорость подъема m/min				L2	L3	L4	L5	L6	H1	H2	H3	B	B1	B2	B3	C	D	
			8	12	8/2	12/2															
			L1																		
T452...	H1	6	500	648		688		287		37											
	H2	9		738		778		332	225	82	32	70	204	390	34	110...150	532	34	370	500	120
	H3	12		818		858		373		122											
T453...	H1	6	1000	709		749		310		54											
	H2	9		814		854		362	225	106	38	70	204	390	34	110...150	532	40	370	550	120
	H3	12		914		954		412		156											
T454...	H1	6	2000	816		880		362		48											
	H2	9		926		990		417	280	103	43	80	252	488	37	130...150	740	45	485	710	175
	H3	12		1026		1090		467		153											
T455...	H1	6	3200	856		923		377		53											
	H2	9		976		1043		437	280	113	54	80	252	488	37	130...150	740	50	485	780	175
	H3	12		1086		1153		492		168											
T456...	H1	6	5000	905		993		395		47											
	H2	9		1010		1098		448	310	99	38	90	285	492	42	130...150	814	56	587	910	210
	H3	12		1115		1203		500		152											

Тип	Полиспаст 2/1		Скорость подъема, m/min			
	Высота подъема, m	Грузопо- дъемность, kg	8	12	8/2	12/2
			Вес, kg			
Т452...	H1	6	500	195		213
	H2	9		215		233
	H3	12		235		253
Т453...	H1	6	1000	220		243
	H2	9		240		263
	H3	12		260		283
Т454...	H1	6	2000	420		467
	H2	9		450		497
	H3	12		475		522
Т455...	H1	6	3200	475	485	540
	H2	9		510	520	575
	H3	12		535	545	600
Т456...	H1	6	5000	720		815
	H2	9		765		860
	H3	12		800		895