


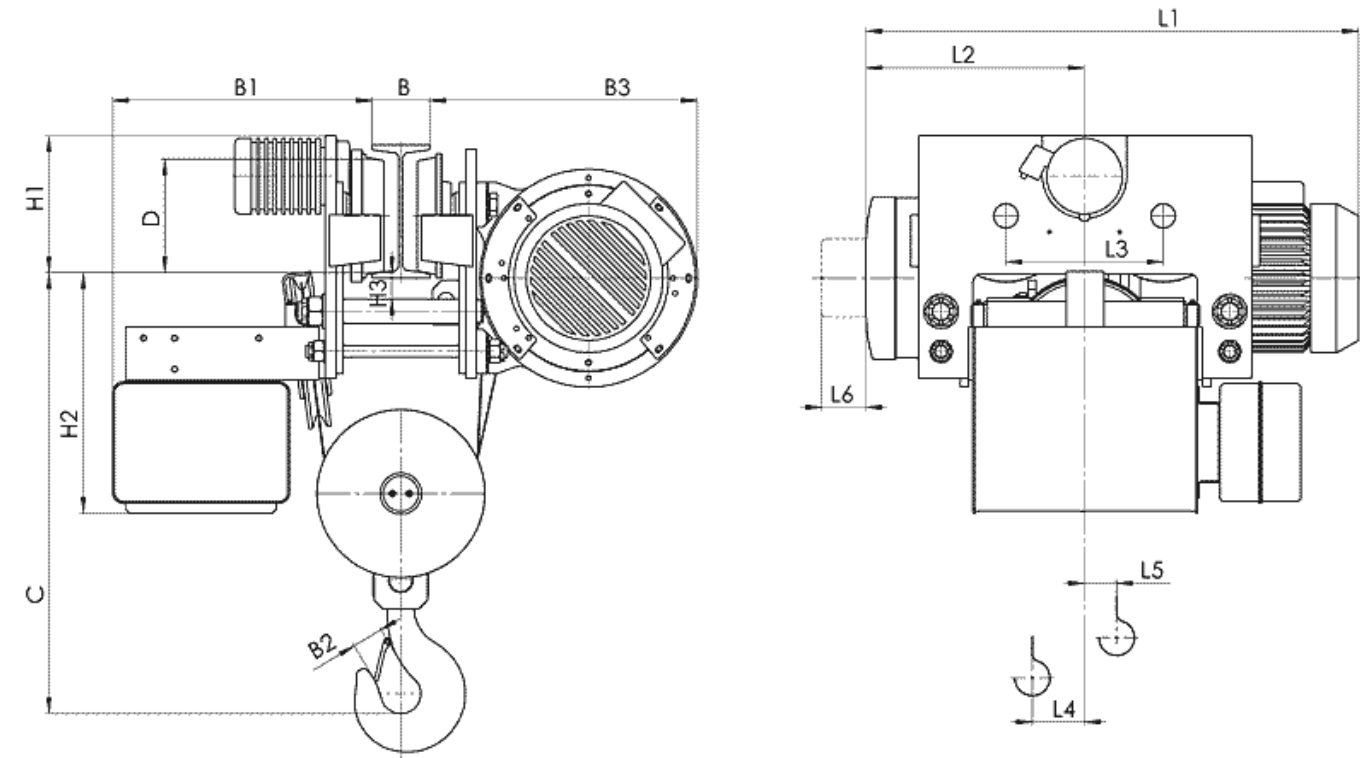

Канатный электротельфер Т78 Уменьшенная строительная высота, полиспаст 4/1

Тип	Полиспаст 4/1		Размеры, mm																			
	Высота подъема, m	Грузопо- дъемность, kg	Скорость подъема m/min				L2	L3	L4	L5	L6	H1	H2	H3	B	B1	B2	B3	C	D		
			4	6	4/1	6/1																
			L1																			
T783...	H3	6	2000	914		954		412	280	85		12	70	253	518	45	130... 150	530	45	387	520	175
	H4	9		1114		1154		512		185		39										
	H5	12		1314		1354		612		285		-85										
T784...	H3	6	4000	1026		1090		467	280	43		50	80	253	458	40.5	130... 150	560	50	504	680	175
	H4	9		1226		1290		567		143		0										
	H5	12		1426		1490		667		243		-53										
T785...	H3	6	6300	1086		1153		492	310	52		56	80	285	475	40.5	130... 150	600	56	510	740	210
	H4	9		1306		1373		602		162		0										
	H5	12		1526		1593		712		272		-57										
T786...	H3	6	10000	1115		1203		500	354	35		68	90	305	445	57.5	130... 150	720	71	616	945	250
	H4	9		1325		1413		605		140		15										
	H5	12		1535		1623		710		240		-60										

Тип	Полиспаст 2/1		Скорость подъема m/min			
	Высота подъема, m	Грузопо- дъемность, kg	8	12	8/2	12/2
			Вес, kg			
T783...	H3	6	2000	320		343
	H4	9		355		378
	H5	12		390		413
T784...	H3	6	4000	510		557
	H4	9		570		617
	H5	12		630		677
T785...	H3	6	6300	605	615	670
	H4	9		665	675	730
	H5	12		725	735	790
T786...	H3	6	10000	758		853
	H4	9		826		921
	H5	12		896		991