


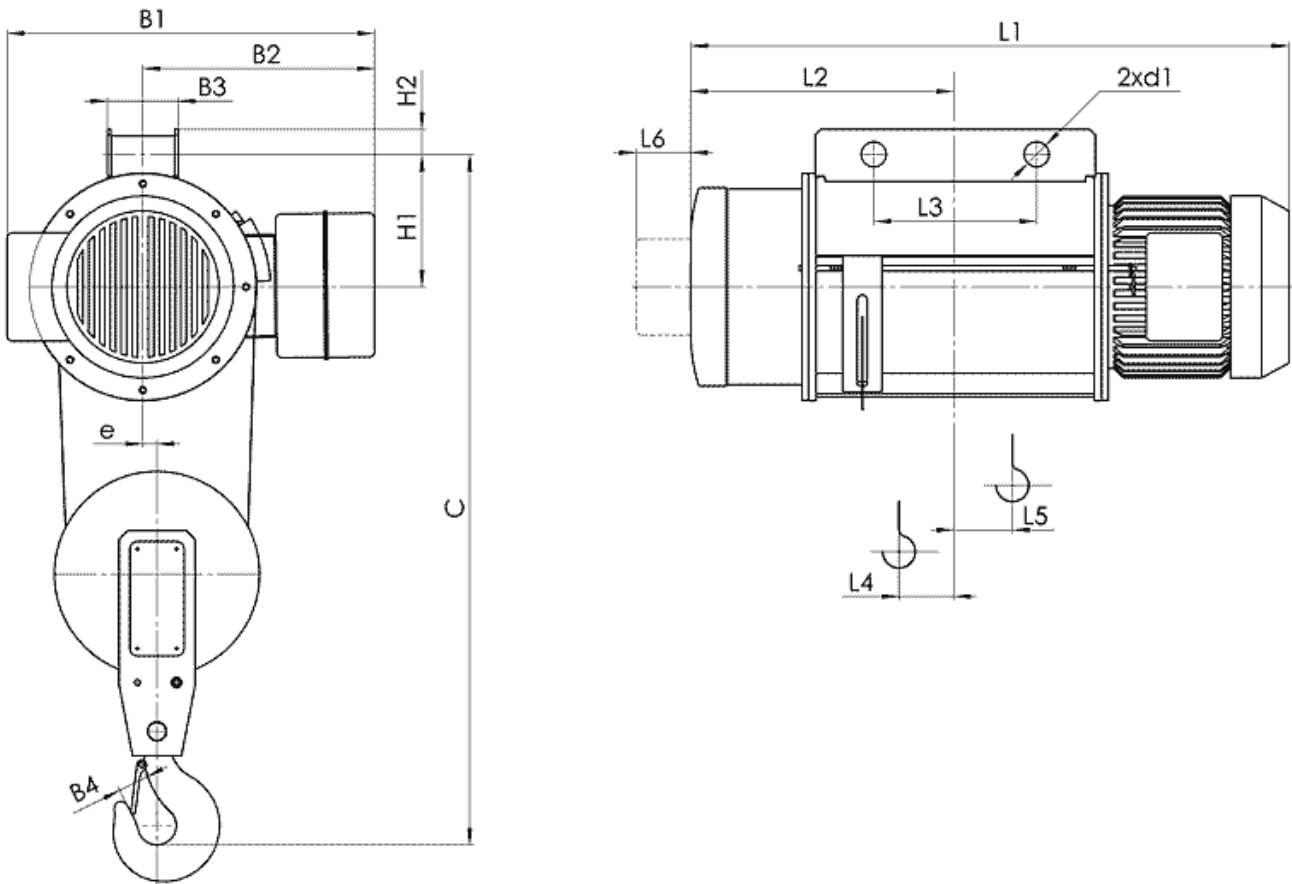


Канатный электротельфер Т02 Стационарный, подвесной на пальцах, полиспаст 2/1

- (1) с микроподъемом
- (2) с ограничителем груза
- (3) с ограничителем груза и с микроподъемом

Тип	Полиспаст 2/1		Размеры, mm																		
	Высота подъема, m	Грузопо- дъемность, kg	Скорость подъема m/min				L2	L3	L4	L5	L6	H1	H2	B1	B2	B3	B4	e	C	d1	
			8	12	8/2	12/2															
			L1																		
T022...	H1	6	500	648	688	287	180	37	45	46	146	23	465	300 365 ⁽²⁾	88	34	18	790	25.5		
	H2	9		738	778	332	250	60	68				492 ⁽¹⁾								
	H3	12		818	858	373	80	88	557 ⁽³⁾												
T023...	H1	6	1000	709	749	310	180	48	55	70	146	23	465	300 365 ⁽²⁾	88	40	18	850	25.5		
	H2	9		814	854	362	250	75	82				492 ⁽¹⁾								
	H3	12		914	954	412	100	106	557 ⁽³⁾												
T024...	H1	6	2000	816	880	362	200	45	51	80	200	30	580	380 442 ⁽²⁾	118	45	22	1040	35.5		
	H2	9		926	990	417	270	73	79				606 ⁽¹⁾								
	H3	12		1026	1090	467	96	104	668 ⁽³⁾												
T025...	H1	6	3200	856	923	377	200	52	59	80	200	30	580	380 442 ⁽²⁾	118	50	22	1120	35.5		
	H2	9		976	1043	437	270	82	89				606 ⁽¹⁾								
	H3	12		1086	1153	492	110	116	668 ⁽³⁾												
T026...	H1	6	5000	905	993	395	225	49	66	90	242	46	675	430 508 ⁽²⁾	130	56	26	1300	46		
	H2	9		1010	1098	448	300	75	82				682 ⁽¹⁾								
	H3	12		1115	1203	500	101	108	760 ⁽³⁾												

Тип	Полиспаст 2/1			Размеры, mm															
	Высота подъема, m		Грузопо- дъемность, kg	Скорость подъема m/min		L2	L3	L4	L5	L6	H1	H2	B1	B2	B3	B4	e	C	d1
				16	16/2.5														
				L1															
T022...	H4	18	500	1026	1090	467	270	97	106	80	200	30	580 606 ⁽¹⁾ 668 ⁽³⁾	380 442 ⁽²⁾	118	45	22	890	35.5
	H5	24		1086	1153	492		97	131										
T023...	H4	18	1000	1086	1153	492		110	118				675 682 ⁽¹⁾ 760 ⁽³⁾	430 508 ⁽²⁾				950	

Тип	Полиспаст 2/1		Скорость подъема, m/min			
	Высота подъема, m	Грузопо- дъемность, kg	8	12	8/2	12/2
			Вес, kg			
Т022...	Н1	6	500	95		113
	Н2	9		100		118
	Н3	12		105		123
Т023...	Н1	6	1000	107		130
	Н2	9		115		138
	Н3	12		124		147
Т024...	Н1	6	2000	207		253
	Н2	9		222		268
	Н3	12		232		278
Т025...	Н1	6	3200	240	250	305
	Н2	9		255	265	320
	Н3	12		270	280	335
Т026...	Н1	6	5000	360		455
	Н2	9		380		475
	Н3	12		400		495

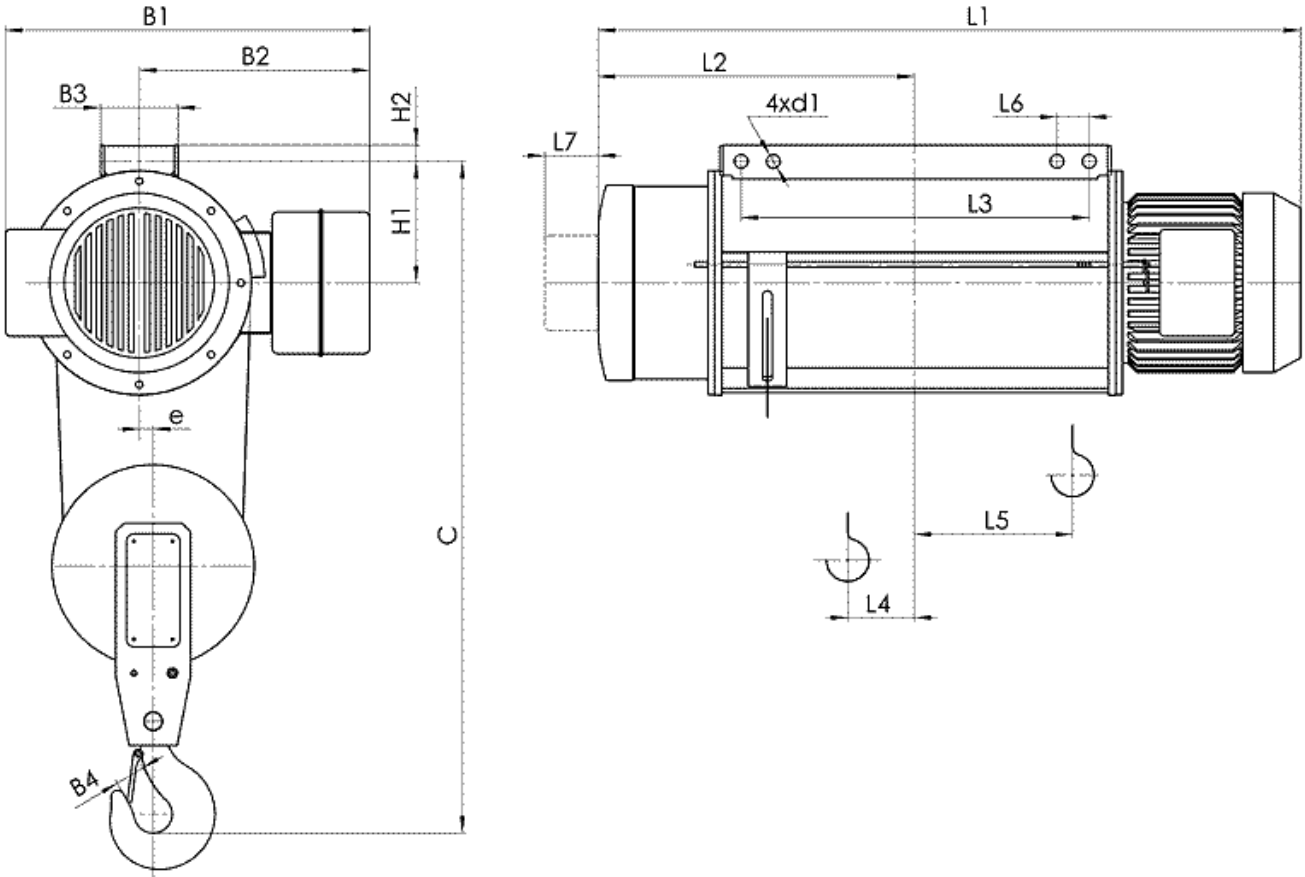

Канатный электротельфер Т02 Стационарный, подвесной на пальцах, полиспаст 2/1

- (1) с микроподъемом
- (2) с ограничителем груза
- (3) с ограничителем груза и с микроподъемом

Тип	Полиспаст 2/1		Размеры, mm																		
	Высота подъема, m	Грузопо- дъемность, kg	Скорость подъема m/min				L2	L3	L4	L5	L6	L7	H1	H2	B1	B2	B3	B4	e	C	d1
			8	12	8/2	12/2															
			L1																		
T022...	H4	18	500	978	1018	452	490	55	192	40	46	138	18	465 492 ⁽¹⁾ 557 ⁽³⁾	300 365 ⁽²⁾	88	34	18	780	16.5	
	H5	24		1138	1178	532	650	55	272												
	H6	30		1226	1290	567	610	89	214	60	80	185	25	580 606 ⁽¹⁾ 668 ⁽³⁾	380 442 ⁽²⁾	128	34	22	870	20.5	
	H7	36		1306	1373	602	680	110	228												
T023...	H4	18	1000	1114	1154	512	610	75	231	40	70	138	18	465 492 ⁽¹⁾ 557 ⁽³⁾	300 365 ⁽²⁾	88	40	18	845	16.5	
	H5	24		1314	1354	612	810	149	332												
	H6	30		1426	1490	667	810	90	312	60	80	185	25	675 682 ⁽¹⁾ 760 ⁽³⁾	430 508 ⁽²⁾	128	40	22	930	20.5	
	H7	36		1526	1593	712	900	110	338												
T024...	H4	18	2000	1226	1290	567	610	90	212	60	80	185	25	580 606 ⁽¹⁾ 668 ⁽³⁾	380 442 ⁽²⁾	128	45	22	1025	20.5	
	H5	24		1426	1490	667	810	90	312												
	H6	30		1535	1623	710	860	88	346	60	90	227	30	675 682 ⁽¹⁾ 760 ⁽³⁾	430 508 ⁽²⁾	144	45	26	1100	25.5	
	H7	36		1640	1728	762	965	75	398												
T025...	H4	18	3200	1306	1373	602	680	110	226	60	80	185	25	580 606 ⁽¹⁾ 668 ⁽³⁾	380 442 ⁽²⁾	128	50	22	1110	20.5	
	H5	24		1526	1593	712	900	110	336												

	H6	30		1640	1728	762	965	75	398	60	90	227	30	675	430	144	50	26	1185	25.5
	H7	36		1815	1903	850	1140	75	436					682 ⁽¹⁾ 760 ⁽³⁾	508 ⁽²⁾					
T026...	H4	18	5000	1325	1413	605	650	124	193	60	90	227	30	675	430	144	56	26	1275	25.5
	H5	24		1535	1623	710	860	124	296					682 ⁽¹⁾ 760 ⁽³⁾	508 ⁽²⁾					
	H6	30		1815	1903	850	1140	124	399					675	430					
	H7	36		1963	1969	905	1145	99	462					765 845 ⁽³⁾	470 550 ⁽²⁾					
T027...	H2	9	8000	1133	1168	507	370	77	82	70	100	295	40	765 845 ⁽³⁾	470 550 ⁽²⁾	68	71	38	1580	41
	H3	12		1293	1328	587	520	118	123											
	H4	18		1453	1488	667	680	78	242											
	H5	24		1668	1703	775	895	78	350											
	H6	30		1883	1918	882	1110	78	457											
	H7	36		2093	2128	987	1320	78	562											

Тип	Полиспаст 2/1			Размеры, mm																
	Высота подъема, m		Грузопо- дъемность, kg	Скорость подъема m/min		L2	L3	L4	L5	L6	L7	H1	H2	B1	B2	B3	B4	e	C	d1
				16	16/2.5															
				L1																
T022...	H6	30	500	1226	1290	567	610	89	214	60	80	185	25	580	380	128	34	22	870	20.5
	H7	35		1306	1373	602	680	110	228					606 ⁽¹⁾ 668 ⁽³⁾	442 ⁽²⁾					
T023...	H5	24	1000	1226	1290	567	610	90	212	60	80	185	25	675	430	128	40	22	930	20.5
	H6	30		1426	1490	667	810	90	312					682 ⁽¹⁾ 760 ⁽³⁾	508 ⁽²⁾					
	H7	36		1526	1590	712	900	110	338											
T024...	H5	24	2000	1325	1413	605	650	75	242	60	90	227	30	675	430	144	45	26	1100	25.5
	H6	30		1535	1623	710	860	88	346					682 ⁽¹⁾ 760 ⁽³⁾	508 ⁽²⁾					
	H7	36		1640	1728	762	965	75	398											
T025...	H4	18	3200	1325	1413	605	650	75	242	60	90	227	30	675	430	144	50	26	1185	25.5
	H5	24		1535	1623	710	860	75	347					682 ⁽¹⁾ 760 ⁽³⁾	508 ⁽²⁾					
	H6	30		1640	1728	762	965	75	398											
	H7	36		1815	1903	850	1140	75	436											
T026...	H4	18	5000	1488	1494	667	690	94	230	50	100	295	40	765	470	68	56	38	1390	25.5
	H5	24		1588	1594	717	790	94	280					845 ⁽³⁾	550 ⁽²⁾					
	H6	30		1778	1784	812	960	94	330											
	H7	36		1963	1969	905	1145	99	462											
T027...	H2	9	8000	1168	1174	507	370	77	82	70	100	295	40	765	470	68	71	38	1580	41
	H3	12		1328	1334	587	520	118	123					845 ⁽³⁾	550 ⁽²⁾					
	H4	18		1488	1494	667	680	78	242											
	H5	24		1703	1709	775	895	78	350											
	H6	30		1918	1924	882	1110	78	457											
	H7	36		2128	2134	987	1320	78	562											

Тип	Полиспаст 2/1		Скорость подъема, m/min							
	Высота подъема, m	Грузопо- дъемность, kg	8	12	8/2	12/2	16	16/2.5		
			Вес, kg							
T022...	H4	18	500	119		137		226		272
	H5	24		128		146		244		290
	H6	30		250		297		251		297
	H7	36		273		320		274		320
T023...	H4	18	1000	137		160		247		293
	H5	24		149		172		263		309
	H6	30		286		333		287		333
	H7	36		306		353		307		353
T024...	H4	18	2000	267		313		466		486
	H5	24		292		338		486		541
	H6	30		526		581		526		581
	H7	36		546		601		546		601
T025...	H4	18	3200	310	320	375		490		545
	H5	24		340	350	405		535		590
	H6	30		525	565	620		565		620
	H7	36		550	590	645		590		645
T026...	H4	18	5000	460		555		818		823
	H5	24		510		605		838		843
	H6	30		570		665		860		865
	H7	36		840		900		900		905
T027...	H2	9	8000	660		720		720		725
	H3	12		700		760		760		765
	H4	18		765		825		825		830
	H5	24		825		885		885		890
	H6	30		880		940		940		945
	H7	36		940		1000		1000		1005