


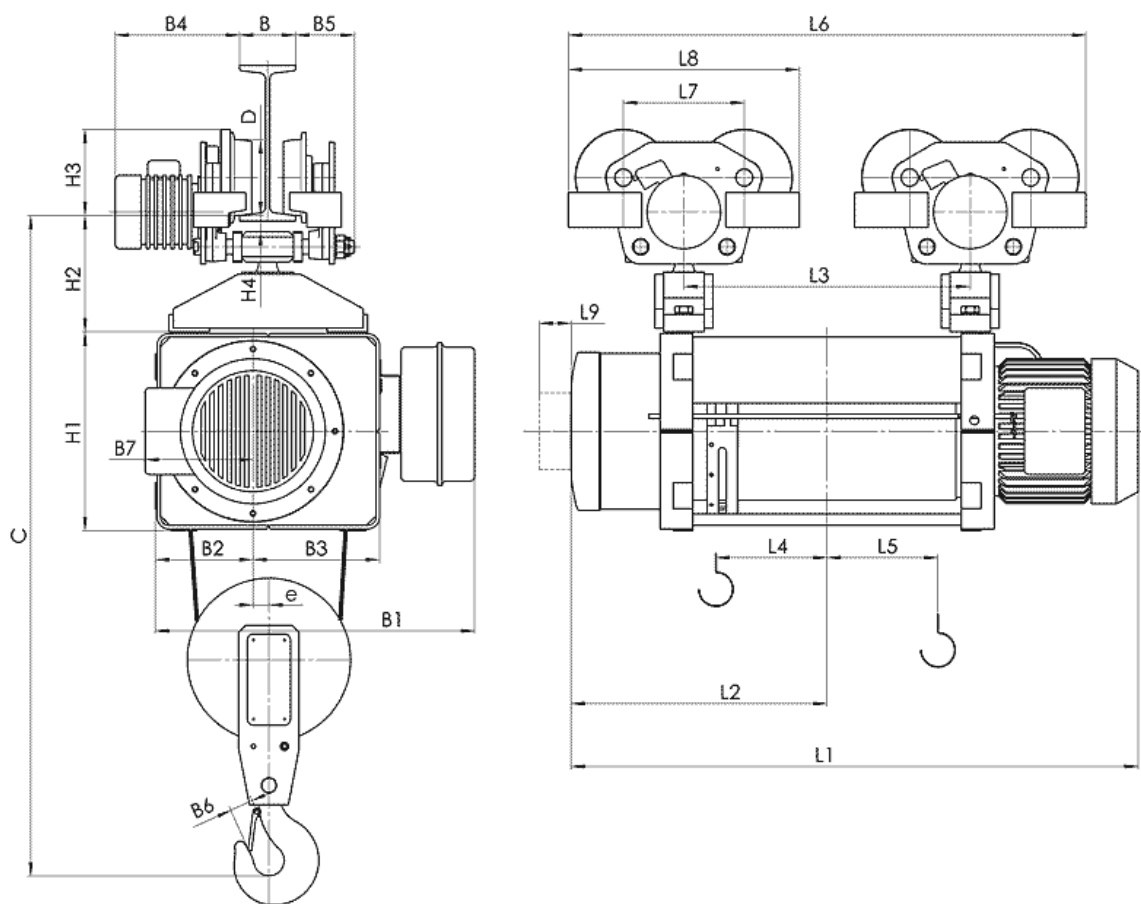

Канатный электротельфер МТ Передвигаемый двумя тележками, полиспаст 2/1

(1) с микроподъемом

(2) с ограничителем груза

Тип	Полиспаст 2/1			Размеры, mm																							
	Высота подъема, m	Грузоподъем- ность, kg	Скорость подъема, m/min	L2	L3	L4	L5	L6	L7	L8	L9	H1	H2	H3	H4	B	B1	B2	B3	B4	B5	B6	B7	C	e	D	
			8 12																								8/2 12/2
			L1																								
MT202	H4 21	500	978 1018	452	509	157	75	924	225	415	70	317	195	148	33	90... 130	560 625 ⁽²⁾	158.5	239.5 302 ⁽²⁾	245... 305	94... 54	34	165 192 ⁽¹⁾	1065	50	120	
	H5 28		1138 1178	532	669	237	75	1084	225	415	80	380	205	148	33	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	245... 305	94... 54	34	172 226 ⁽¹⁾	1140	36	120	
	H6 37		1226 1290	567	641	207	92	1056	225	415	80	380	205	148	33	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	245... 305	94... 54	34	172 226 ⁽¹⁾	1140	36	120	
	H7 42		1306 1373	602	711	237	97	1126	225	415	80	380	205	148	33	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	245... 305	94... 54	34	172 226 ⁽¹⁾	1140	36	120	
MT305	H4 20	1000	1114 1154	512	629	198	92	1044	225	415	70	317	195	148	33	90... 130	560 625 ⁽²⁾	158.5	239.5 302 ⁽²⁾	245... 305	94... 54	40	165 198 ⁽¹⁾	1135	50	120	
	H5 27		1314 1354	612	829	298	92	1244	225	415	70	317	195	148	33	90... 130	560 625 ⁽²⁾	158.5	239.5 302 ⁽²⁾	245... 305	94... 54	40	165 198 ⁽¹⁾	1135	50	120	
	H6 38		1426 1490	667	841	295	90	1256	225	415	80	380	205	148	33	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	245... 305	94... 54	40	172 226 ⁽¹⁾	1210	36	120	
	H7 42		1526 1593	712	931	335	95	1346	225	415	80	380	205	148	33	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	245... 305	94... 54	40	172 226 ⁽¹⁾	1210	36	120	
MT410	H4 20	2000	1226 1290	567	641	195	90	1177	280	536	80	380	235	200	37	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	270... 335	125.. 105	45	172 220 ⁽¹⁾	1330	36	175	
	H5 26		1426 1490	667	841	295	90	1377	280	536	80	380	235	200	37	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	270... 335	125.. 105	45	172 220 ⁽¹⁾	1330	36	175	
	H6 34		1535 1623	710	873	302	90	1409	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	45	212 257 ⁽¹⁾	1445	38	175	
	H7 39		1640 1728	762	978	355	90	1514	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	45	212 257 ⁽¹⁾	1445	38	175	
	H8 47		1815 1903	850	1153	443	90	1689	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	45	212 257 ⁽¹⁾	1445	38	175	
	H9 52		1955 2043	920	1293	513	90	1829	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	45	212 257 ⁽¹⁾	1445	38	175	
	H10 60		2125 2213	1005	1463	598	90	1999	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	45	212 257 ⁽¹⁾	1445	38	175	
MT516	H4 18	3200	1306 1373	602	711	225	95	1247	280	536	80	380	235	200	37	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	270... 335	125.. 105	50	172 226 ⁽¹⁾	1415	34	175	
	H5 25		1526 1593	712	931	335	95	1467	280	536	80	380	235	200	37	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	270... 335	125.. 105	50	172 226 ⁽¹⁾	1415	34	175	
	H6 32		1640 1728	762	978	355	90	1514	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	50	212 257 ⁽¹⁾	1530	38	175	
	H7 38		1815 1903	850	1153	443	90	1689	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	50	212 257 ⁽¹⁾	1530	38	175	
	H8 43		1955 2043	920	1293	513	90	1829	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	50	212 257 ⁽¹⁾	1530	38	175	
MT625	H4 17	5000	1325 1413	605	663	200	88	1199	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	56	212 257 ⁽¹⁾	1620	37	175	
	H5 23		1535 1623	710	873	305	88	1409	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	56	212 257 ⁽¹⁾	1620	37	175	
	H6 30		1815 1903	850	1153	445	88	1689	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	56	212 257 ⁽¹⁾	1620	37	175	
	H7 35		1955 2043	920	1293	515	88	1829	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	56	212 257 ⁽¹⁾	1620	37	175	
	H8 40		2125 2213	1005	1463	600	88	1999	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	56	212 257 ⁽¹⁾	1620	37	175	
	H9 46		2253 2288	1067	1513	578	128	2049	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	56	212 257 ⁽¹⁾	1620	37	175	
	H10 54		2503 2538	1192	1763	703	128	2299	280	536	80	380	235	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	56	212 257 ⁽¹⁾	1620	37	175	

[illegible]

[illegible]

[illegible]

[illegible]

Тип	Полиспаст 2/1		Размеры, mm																											
	Высота подъема, m	Грузоподъемность, kg	Скорость подъема, m/min		L2	L3	L4	L5	L6	L7	L8	L9	H1	H2	H3	H4	B	B1	B2	B3	B4	B5	B6	B7	C	e	D			
			16	16/4																										
			L1																											
MT202	H4 21	500	1026	1090	467	441	157	75	856	225	415	80	380	205	148	33	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	245... 305	94... 54	34	172 226 ⁽¹⁾	1140	36	120			
	H5 28		1086	1153	492	491	237	75	906																					
	H6 37		1226	1290	567	641	207	92	1056																					
	H7 42		1306	1373	602	711	237	97	1126																					
MT305	H4 20	1000	1114	1154	492	491	198	92	906	225	415	80	380	205	148	33	130... 150	618 680 ⁽²⁾	186	250 314.5 ⁽²⁾	245... 305	94... 54	40	172 226 ⁽¹⁾	1210	36	120			
	H5 27		1314	1354	567	641	298	92	1056																					
	H6 38		1426	1490	667	841	295	90	1256																					
	H7 42		1526	1593	712	931	335	95	1346																					
MT410	H5 26	2000	1325	1413	605	663	200	90	1199	280	536	90	466	270	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	45	212 257 ⁽¹⁾	1445	38	175			
	H6 34		1535	1623	710	873	302	90	1409																					
	H7 39		1640	1728	762	978	355	90	1514																					
	H8 47		1815	1903	850	1153	442	90	1689																					
	H9 52		1955	2043	920	1293	513	90	1829																					
	H10 60		2125	2213	1005	1463	598	90	1999																					
MT516	H5 25	3200	1535	1623	710	873	305	90	1409	280	536	90	466	270	200	37	130... 150	752 830 ⁽²⁾	229	294 365.5 ⁽²⁾	270... 335	125.. 105	50	212 257 ⁽¹⁾	1530	38	175			
	H6 32		1640	1728	762	978	355	90	1514																					
	H7 38		1815	1903	850	1153	442	90	1689																					
	H8 43		1955	2043	920	1293	513	90	1829																					
	H9 49		2125	2213	1005	1463	598	90	1999																					
MT625	H2 9	5000	1168	1174	507	600	68	78	1195	280	536	100	540	265	200	37	130... 150	880 960 ⁽²⁾	271	369 453.5 ⁽²⁾	270... 335	125.. 105	56	266	1925 1700	56	175			
	H3 14		1328	1334	587	600	148	78	1195																					
	H4 17		1488	1494	667	713	178	128	1249																					
	H5 23		1588	1594	717	813	228	128	1349																					
	H6 30		1778	1774	812	1003	323	128	1539																					
	H7 35		1963	1969	905	1188	414	128	1724																					
	H8 40		2093	2128	987	1353	498	128	1889																					
	H9 46		2253	2288	1067	1513	578	128	2049																					
	H10 54		2503	2538	1192	1763	703	128	2299																					
MT740	H2 8	8000	1168	1174	507	600	68	78	1195	310	595	100	540	292	230	30	130... 150	880 960 ⁽²⁾	271	369 453.5 ⁽²⁾	300... 365	145.. 125	71	266	1910	56	210			
	H3 12		1328	1334	587	600	148	78	1195																					
	H4 17		1488	1494	667	713	178	128	1308																					
	H5 23		1703	1709	775	928	285	128	1523																					
	H6 29		1918	1924	882	1143	392	128	1738																					
	H7 35		2128	2134	987	1353	498	128	1948																					
	H8 40		2288	2294	1067	1513	578	128	2108																					
	H9 47		2538	2544	1192	1763	703	128	2358																					
	H10 52		2728	2734	1287	1953	798	128	2548																					

Тип	Полиспаст 2/1			Скорость						
	Высота подъема, м		Грузоподъем- ность, kg	подъема, м/min						
				8	12	8/2	12/2	16	16/2.5	
				Бес, kg						
MT202	H4	21	500	193	210	296	342			
	H5	28		202	227	314	360			
	H6	37		330	374	321	367			
	H7	42		350	394	344	390			
MT305	H4	20	1000	218	240	342	385			
	H5	27		230	252	357	400			
	H6	38		385	407	385	407			
	H7	42		405	427	405	427			
MT410	H4	20	2000	460	503	-	-			
	H5	26		480	523	705	541			
	H6	34		765	825	765	825			
	H7	39		785	845	785	845			
	H8	47		820	880	820	880			
	H9	52		855	915	855	915			
	H10	60		890	960	890	960			
MT516	H4	18	3200	490	500	575	-	-		
	H5	25		510	520	575	770	660		
	H6	32		790	800	790	790	830		
	H7	38		825	835	825	825	865		
	H8	43		860	870	860	860	900		
	H9	49		890	900	890	890	930		
MT625	H4	17	5000	705	765	960	895			
	H5	23		760	820	1070	925			
	H6	30		730	890	1140	975			
	H7	35		1020	1080	1195	1200			
	H8	40		1065	1125	1225	1230			
	H9	46		1200	1260	1270	1275			
	H10	54		1270	1330	1340	1345			
	H11	60		1325	1385	1395	1400			
MT740	H2	8	8000	1005	1065	1065	1070			
	H3	12		1045	1105	1105	1110			
	H4	17		1080	1240	1240	1250			
	H5	23		1135	1195	1195	1200			
	H6	29		1185	1245	1245	1250			
	H7	35		1245	1305	1305	1310			
	H8	40		1290	1350	1350	1355			
	H9	47		1360	1420	1420	1425			
	H10	52		1415	1475	1475	1480			

Тип	Полиспаст 2/1		Скорость подъема, m/min					
	Высота подъема, m	Грузоподъем- ность, kg	8	12	8/2	12/2	16	16/2.5
			Вес, kg					
MT750	H2	8	10000	1040	1100	1100	1105	
	H3	12		1080	1140	1140	1145	
	H4	17		1120	1180	1180	1185	
	H5	23		1170	1230	1230	1235	
	H6	29		1230	1290	1290	1295	
	H7	35		1295	1355	1355	1360	
	H8	40		1340	1400	1400	1405	
	H9	47		1415	1475	1475	1480	
	H10	52		1475	1535	1535	1540	

Тип	Полиспаст 2/1		Скорость			
	Высота подъема, м	Грузоподъем- ность, kg	подъема, m/min			
			6	9	6/1.5	9/1.5
			Вес, kg			
MT763	H2	8	12500	1040	1100	
	H3	12		1080	1140	
	H4	17		1120	1180	
	H5	23		1170	1230	
	H6	29		1230	1290	
	H7	35		1295	1355	
	H8	40		1340	1400	
	H9	47		1415	1475	
	H10	52		1475	1535	

Тип	Полиспаст 2/1		Скорость			
	Высота подъема, m	Грузоподъем- ность, kg	подъема, m/min			
			4	6	4/1	6/1
			Вес, kg			
MT780	H3	24	16000	1240	1300	
	H4	34		1315	1375	
	H5	46		1375	1435	
	H6	58		1430	1495	
	H7	70		1500	1560	
	H8	80		1555	1615	
	H9	94		1625	1675	
	H10	104		1685	-	